

VIVATEC™

BECOMES

SAFETYRESPECT®





Contents

We are Vivatec	2 - 5	Catch Fan	40 - 45
Research and Development	6 - 7	Access Solutions	46 - 67
Services	8 - 11	Stairways	46 - 55
Collective Edge Protection	12 - 39	Container Podest	56 - 59
Steel Barriers	12 - 15	Trench Bridges	60 - 63
Square System	16 - 23	Lift Shaft Gate	64 - 66
Round System	24 - 27	Joist Hanger	67
Aluminium Beam System	28 - 29	Construction Equipment	68 - 69
PushUp Post	30 - 33	Product Overview	70 - 71
Façade Bracket	34 - 37		
Universal Accessories	38		
Packaging	39		

We make construction sites safer since 2010.

We have continued to develop along this path, in an ongoing phase of significant economic and technological growth. We have taken a big step towards further growth by becoming part of the Swedish SafetyRespect Group.

What makes our company tick, what constitutes our basic attitude? We work every day to make working on construction sites safer, whether by implementing professional edge protection instead of improvised "solutions" or by using stairways instead of single ladders. Development and production of standard-compliant and economical systems Made in Germany, all from a single source.

Social and ecological aspects are at least as important to us.

We are aware that small and medium-sized enterprises in Germany also play an important integrative role; people from 15 nations work for us!



Furthermore, we have taken measures to become a completely carbon-neutral company. As a production company that manufactures its own components to a considerable extent, we are fully on track to have a balanced carbon footprint from 2025 onwards.

Our team is proud of what it has already achieved in economic-technological as well as in social and ecological terms, and we will consistently continue along the path we have chosen.

The entire Vivatec team looks forward to working with you!

*Gunnar Monheimius
Managing Director Vivatec Safety GmbH*

We at SafetyRespect are now a market leading expert in fall protection for the construction industry and we operate on an international market. We develop, manufacture and market collective and personal fall protection, with a clear user focus, both sales and rentals are offered in our business model. The group has a turnover of approximately SEK 200 million this year.

Vivatec GmbH with its base and production in Germany has Western Europe as its primary market. The range is well developed within collective fall protection and various access solutions. The company has a turnover of approximately SEK 60 million and has 25 employees.

SafetyRespect has now acquired Vivatec and they will become part of the SafetyRespect Group. The operations will be merged and continue under the SafetyRespect brand. The autumn's major Bauma construction fair will be a clear kickoff for this investment. Vivatec's founder and CEO Gunnar Monheimius will continue in his current role.

We see a very exciting future in combining the two companies into the market leading fall protection expert. Welcome Vivatec-team!

*Per Ramberger
CEO SafetyRespect AB*

In Iserlohn, in the heart of the German metal processing industry, we at Vivatec Safety develop, produce and market products and services that improve safety and working practices on construction sites.

Our core competences include the design and manufacture of high-quality edge protection components, catch fans and access solutions.

Whether colleagues from production, the development department, logistics or the office, our common goal is to work with you to make your construction project safer.

WE. PRODUCE. SAFETY. meets WE SAVE LIVES



We take great care to recognise and accept challenges.

Whether it is special solutions, optimally adapted to your requirements, or products from our standard range, for us at Vivatec none of your orders are too big or too small.

We always act efficiently, safely, sustainably, quickly and reliably.

We see ourselves, among other things, as problem solvers who are dedicated to the tasks at hand in an objective and committed manner. Finding creative and at the same time economically sensible solutions is always our claim.

Our experience and our passion for building have made us the reliable partner we are today.

For us, the social component is just as important as working economically. We give people of all backgrounds the chance to develop and discover their strengths.

Furthermore, as a training company, we offer ambitious people the opportunity for an exciting apprenticeship and a perspective in our family business.

Since 01 September 2022, we are part of the Swedish SafetyRespect Group and contribute our know-how and experience. SafetyRespect and Vivatec Safety have similar backgrounds and values, which is why the merger was the right thing to do to be able to offer our customers even more together.

As the German arm of the SafetyRespect Group, we will continue to serve mainly the Central European market with our solutions and those from the SafetyRespect range. We will continue to develop our product range, as our customers have come to expect from Vivatec Safety.



**WE. PRODUCE. SAFETY. –
AND BEAR RESPONSIBILITY FOR OUR ENVIRONMENT.**

As a steel-processing, manufacturing company, we do not ignore climate protection. We think ecologically and keep a constant eye on the CO2 balance of our company.

For example: Steel

- Without steel there would be no construction industry. But we can pay attention to where our steel comes from and how it was produced. Vivattec Safety sources its steel exclusively from Europe.

For example: Packaging

- Wherever possible, we do without environmentally harmful foil and one-way pallets. Instead, we pack our products in reusable stillages and mesh boxes or on durable Euro pallets.


For example: Machinery

- The most sustainable machine is the one that is not manufactured in the first place. Vivattec Safety relies on a mix of maintenance and continued use of long-lasting machines on the one hand and new acquisition of professional technique that saves emissions through efficiency and new technologies on the other.

As a production company that manufactures its own components to a considerable extent, we are fully on track to achieve a balanced CO2 balance from 2025 onwards and thus become the ecological pioneer among edge protection manufacturers. To achieve this, we are also dependent on you, our customers and suppliers. Therefore, we already give preference to suppliers who, like us, are making serious efforts regarding carbon neutrality or have already successfully done so.

Our colleagues at SafetyRespect also share our values when it comes to sustainable and considerate business, which is evident both in the CO2-optimised transport concepts and in the equally ambitious goals around carbon neutrality.



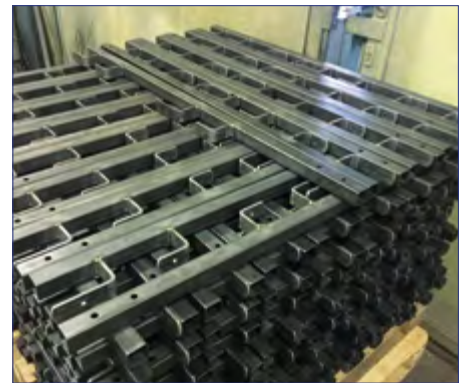


Innovativeness prevents standstill

Faithful to this motto, we plan safety on your construction site every day. As much as the construction industry has changed in recent years, we are all the more passionate about the resulting demands on our work.

Technical progress, the move towards ecological thinking, but also complications due to unforeseeable crises: All of this presents us with new challenges time and again, which we - safely - master.

The world turns and we turn with it.

Developing something once and finding it to be good is not enough for us. In addition to designing new products, we also constantly revise our classics and our special components with the help of your ideas and suggestions, and continuously test and develop them further.

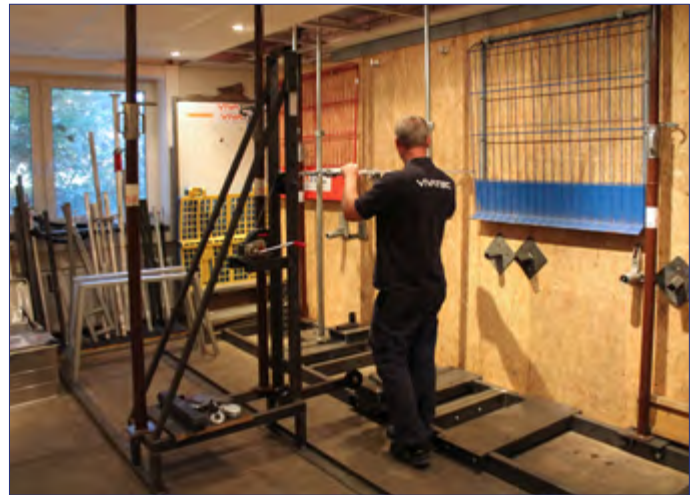

Only products that have been tested in our in-house test centre to at least meet the legal requirements and standards of the respective country of application leave our warehouse.

As a developer, as well as a producer, we bear a high responsibility towards you and our products, which we are fully aware of.

Our research and development department pursues two main areas of work:

- On the one hand, our engineers are constantly developing our existing products and looking for ways to optimise them. Suggestions from our customers also flow into this process time and again.
- On the other hand, we plan special solutions for you to guarantee optimum safety in every construction phase of every building project.



IN-HOUSE PRODUCTION


It's all in the mix.

Whether large series or unique specimen, in our production halls we make your wishes come true. With our international and qualified team, we manufacture the majority of the products we sell in-house.

We trade globally and produce locally.

As an original equipment manufacturer, we control all processes from product development to manufacturing, quality control and final assembly, right through to shipping to our customers worldwide. At the same time, we can react extremely flexibly to your wishes and requirements with regard to time specifications and delivery quantities.

The constantly growing know-how of our employees is supported by modern technology and computer technology.

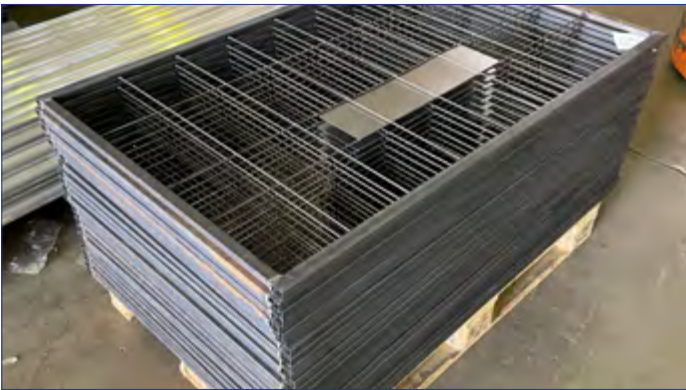

Certified quality.

As a welding company with in-house production control, we are certified according to EN 1090 (No.: 2324-CPR-0351 for load-bearing components and kits for steel structures up to EXC2 according to EN 1090-2).

This certifies that Vivatec Safety applies all the provisions on assessment and verification of constancy of performance described in Annex ZA of the harmonised standard

EN 1090-1: 2009+A1:2011,

in accordance with system 2+, and that the company production control fulfils all the requirements prescribed therein.



COMPREHENSIVE SERVICE - A MATTER OF COURSE FOR US.

We develop, produce and distribute user-friendly products and solutions that meet the international safety requirements of the countries of operation, for example the European Standards (EN). Our work is guided in all areas by the values of product quality, sustainability and reliability, whereby we are committed to the quality brand 'Made in Germany' in the best sense of its meaning.

Consequently, we support you as a solution-oriented company with a comprehensive service package. For example, we relieve you if necessary or take over the planning of the safety components for your building project completely and create attractive training and installation concepts for the respective Vivatec systems.

Furthermore, we prototype your product ideas for you and create drawing sets on your behalf, carry out test procedures and are also happy to take on any limited quantity production or series production, respectively. On request, we can also powder-coat edge protection barriers in the colour of your choice, apply your logo, and private label the individual system components.

Regardless of whether you are building on a large construction site or want to increase your stock of edge protection components and access solutions: the personal, direct customer service provided by the experienced employees of our dedicated team always comes first.



Your success is our success.

We know that producing and supplying components is often not enough. You may need detailed preliminary and implementation planning for our systems, you may want to outsource the installation of your edge protection, catch fan and access solutions to ensure that they are installed compliant with standards.

No matter what 'extra' service you need to make your project a success: We are your contact for all questions regarding 'safety on the construction site'.

COLLECTIVE EDGE PROTECTION

STEEL BARRIERS




The Vivatec edge protection system consists of three basic components:

A steel barrier, a bottom attachment corresponding to the construction situation and two square or round posts form a temporary edge protection that complies with the safety requirements according to EN 13374-A.

1

Vivatec Steel Barrier

With its integrated toeboard, the barrier replaces the classic 3-part edge protection. The steel barrier is available in two sizes.

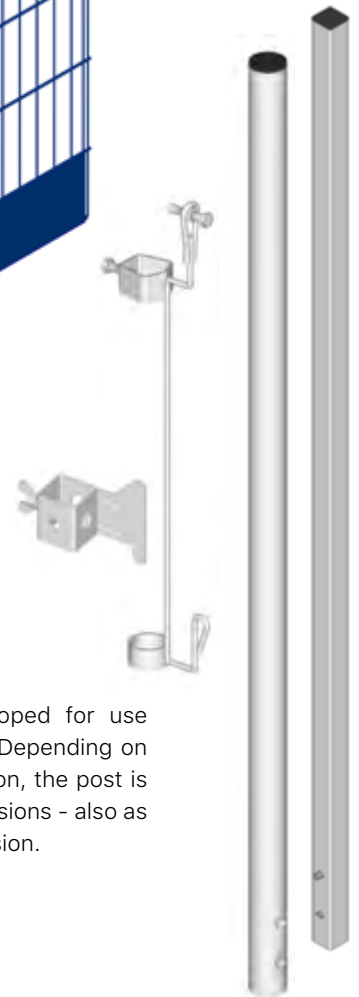

2

VT Post

The posts were developed for use with the steel barriers. Depending on the construction situation, the post is available in different versions - also as a height-adjustable version.

3

VT Bottom Attachment

Depending on the area of application of the temporary edge protection, different bottom attachments are required to mount the post. Vivatec Safety offers attachments for all essential areas that comply with the requirements for temporary edge protection in accordance with EN 13374-A.



COLLECTIVE EDGE PROTECTION

STEEL BARRIERS




The Vivatec Steel Barrier


The Vivatec Steel Barriers replace the classic 3-part edge protection made of wood, because they are handrail, knee-board and toeboard in one. The robust steel barriers are versatile, quick-to-install system parts with excellent product quality thanks to the latest production methods. In combination with the VT Post 1500 or various aluminium


posts, they are part of a height-adjustable edge protection system. A wide range of attachments is available for a variety of applications. A large selection of RAL colours and, for even greater corrosion protection, an additional pre-galvanisation complete the range.

STEEL BARRIER 1300 x 1180

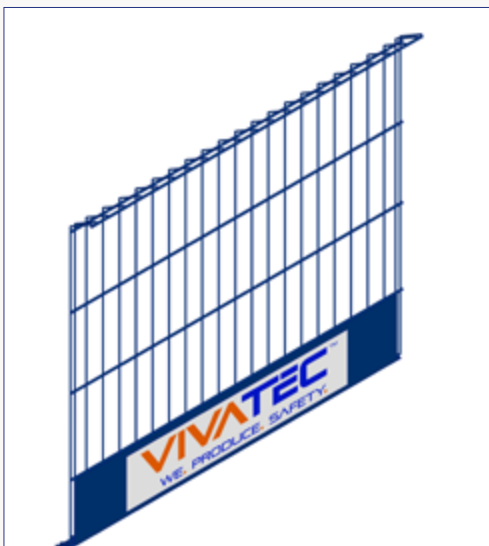


Art. 2011311


 9.3 kg

 EN 13374, class A

 powder-coated


 1300 x 1180 mm

STEEL BARRIER 2600 x 1180

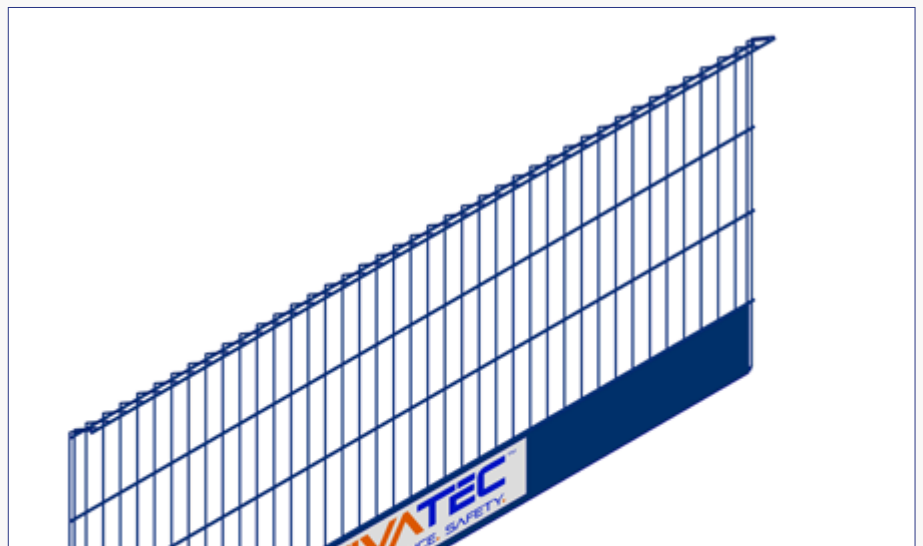


Art. 2012611


 18 kg

 EN 13374, class A

 powder-coated

 2600 x 1180 mm

STEEL BARRIER 1300 x 1150, 90° R

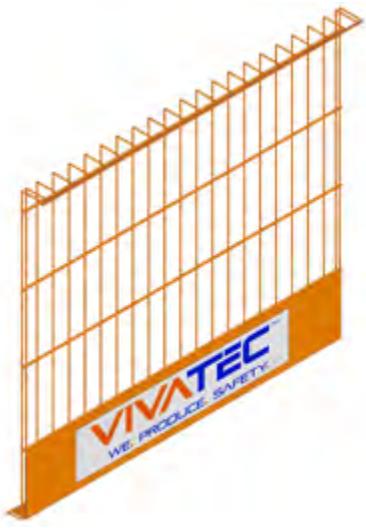

Art. 201131190R


KG 8.6 kg

§ EN 13374, class A

🔧 powder-coated

↗ 1300 x 1180 mm

STEEL BARRIER 2600 x 1150, 90° R

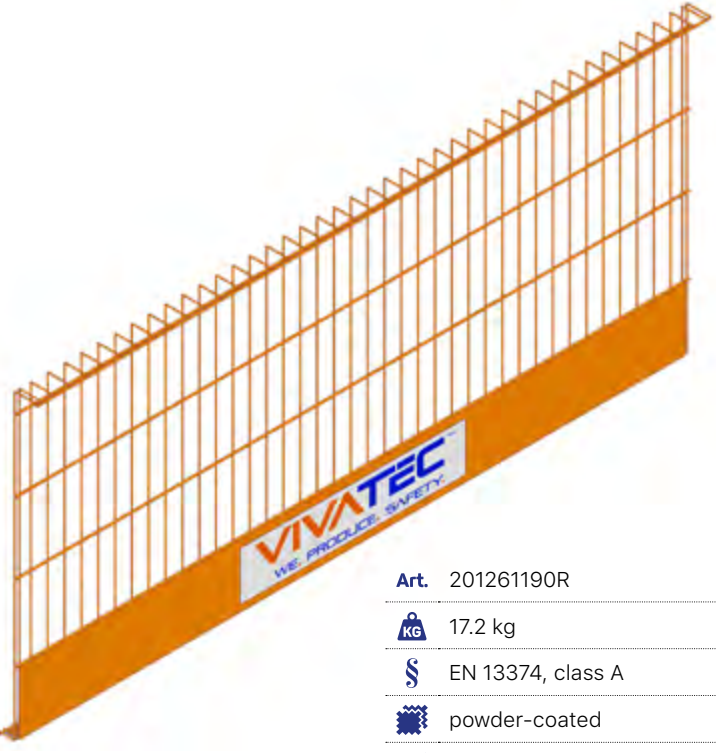

Art. 201261190R


KG 17.2 kg

§ EN 13374, class A

🔧 powder-coated

↗ 2600 x 1180 mm

BARRIER FRAME 60

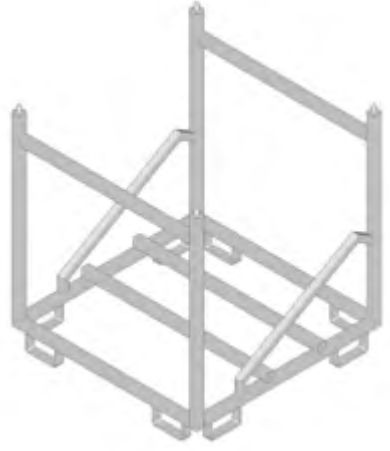

Depending on the type of barrier, between 45 and 60 barriers can be transported.

Art. 2010007


KG 89 kg

§ EN 13374, class A

🔧 hot-dip galvanised (HDG)

↗ 1335 x 1200 x 1200 mm

MAKE UP BARRIER 2,6 M

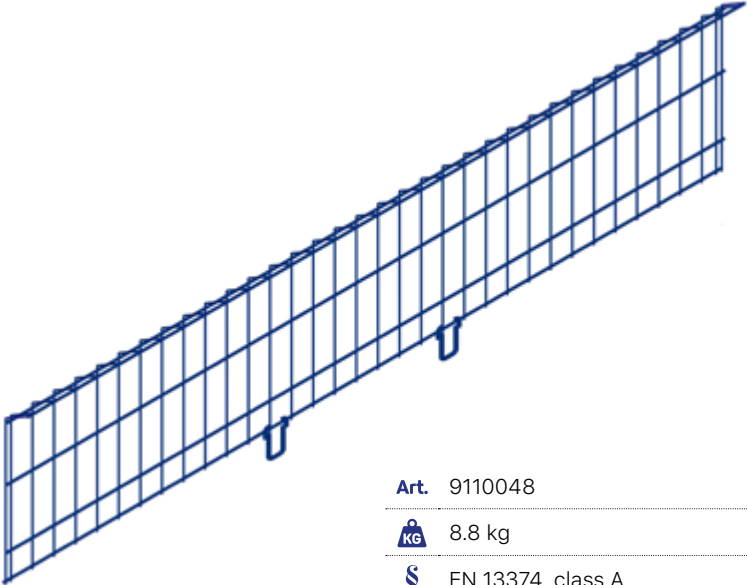

Art. 9110048

KG 8.8 kg

§ EN 13374, class A

🔧 powder-coated

↗ 2600 x 700 mm

COLLECTIVE EDGE PROTECTION

SQUARE SYSTEM


VT POST 1500 BASIC / INCL. SLIDER




The VT Post 1500 incl. Slider has been developed for use with the Vivatec Steel Barriers. The VT Slider, which is included in the scope of delivery and is equipped with a locking screw, allows the steel barriers to be adjusted to the desired height. Due to the built-in Easy Snap locking mechanism, the VT Post 1500 incl. Slider snaps self-locking into the post holder.

Art. 5031500B / 5031500

 3.3 kg / 3.5 kg

 EN 13374, class A

 hot-dip galvanised (HDG)

 1500 x 35 x 35 mm


VT POST 1300 BASIC / INCL. SLIDER




The VT Post 1300 incl. Slider has been developed for use with the Vivatec Steel Barriers. The VT Slider, which is included in the scope of delivery and is equipped with a locking screw, allows the steel barriers to be adjusted to the desired height, while the welded-on hook provides additional anti-lifting protection.

Art. 5031300B / 5031300

 3.2 kg / 3.4 kg

 EN 13374, class A

 hot-dip galvanised (HDG)

 1300 x 35 x 35 mm





VT POST 1200 TIMBER




The VT Post 1200 Timber has been developed for use with the Vivatec Steel Barriers or suitable wooden boards. In combination with the VT Toeboard Holder (50311951), the result is a three-part wooden edge protection consisting of handrail, kneeboard and toeboard. The welded-on hooks have holes for nailing or screwing the wooden boards.

Art. 5031195

 3.4 kg

 EN 13374, class A

 hot-dip galvanised (HDG)


 1200 x 35 x 35 mm


VT SCAN POST 1200




The VT Scan Post 1200 has been developed for use with the Vivatec Steel Barriers or suitable wooden boards or square timbers. In combination with the VT Toeboard holder (50311951), the result is a multi-part wooden edge protection consisting of handrail, kneeboard and toeboard. The welded-on hooks have holes for nailing or screwing the wooden boards.

Art. 5039003

 3.6 kg

 EN 13374, class A

 hot-dip galvanised (HDG)

 1200 x 35 x 35 mm

VT POST FRENCH INCL. SLIDER



The VT Post French incl. Slider has been developed for use with the Vivatec steel barriers. The VT Slider, which is included in the scope of delivery and is equipped with a locking screw, allows the steel barriers to be adjusted to the desired height. Due to the built-in Easy Snap locking mechanism, the VT French Post incl. Slider snaps into the post holder.

Art. 5030016

KG 4.2 kg

§ EN 13374, class A

🔧 hot-dip galvanised (HDG)

↗ 1400 x 35 x 35 mm

VT POST EXTENSION 240 / 425



The VT Post Extensions are used to increase the length of posts when the structural conditions require it. The lower part, equipped with the Easy Snap locking mechanism, snaps into the post holder of the attachment and offers the possibility of post fixing with the post holder welded on above.

Art. 5030240 / 5030425

KG 0.9 kg / 1.3 kg

§ EN 13374, class A

🔧 hot-dip galvanised (HDG)

↗ 350 / 535 x 40 x 40 mm

VT SLIDER



The VT Slider is used for stepless height adjustment of the different steel barriers. The locking screw attached to the slider allows the respective steel barriers to be fixed at the respective height.

Art. 50315008

KG 0.2 kg

§ EN 13374, class A

🔧 electrogalvanised

↗ 130 x 92 mm

VT HOLDER XL / XL 45



Like the VT Slider, the VT Holder XL and the VT Holder XL 45 are used for stepless height adjustment of the different steel barriers.

Art. 5030049 / 5030050

KG 1.0 / 1.1 kg

§ EN 13374, class A

🔧 electrogalvanised

↗ 720 mm

VT TOEBOARD HOLDER



The VT Toeboard Holder is used to attach a toeboard within a 3-part wooden edge protection system. Designed for boards with a height of 150 mm and a thickness of 30 mm, the VT Toeboard Holder is simply pulled onto the post from below.

Art. 50311951

KG 0.5 kg

§ EN 13374, class A

🔧 hot-dip galvanised (HDG)

↗ 178 x 111 mm

COLLECTIVE EDGE PROTECTION


SQUARE SYSTEM


VT FOOT




The VT Foot is used to hold an edge protection post on all flat surfaces, e.g. in-situ concrete ceilings. This horizontal attachment can be fastened with various screws and anchors.

Art. 5040001

 1.1 kg

 EN 13374, class A

 hot-dip galvanised (HDG)


 195 x 130 mm


VT ECO FOOT




The VT Eco Foot has been developed to save costs and transport volume. It is used to hold an edge protection post and can be fixed on all flat surfaces.

Art. 5041001


 1.0 kg

 EN 13374, class A

 hot-dip galvanised (HDG)


 200 x 120 x 35 mm


VT FLAT FOOT / FLAT FOOT V2

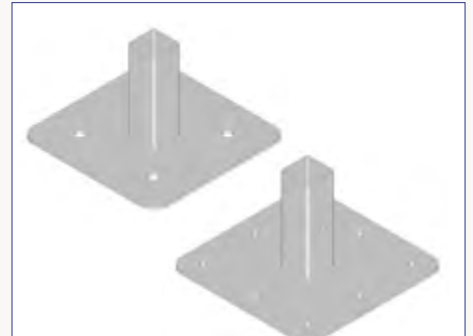


The VT Flat Foot and the VT Flat Foot V2 form the basis of standard-compliant edge protection on wooden structures and are used to hold an edge protection post.

Art. 1100007F / 1100025

 1.4 / 1.4 kg

 EN 13374, class A

 hot-dip galvanised (HDG)

 200 x 200 mm



VT EDGE 55



The VT Edge 55 is mainly used to reliably secure the edges of stairs. The cantilever of the post to be used is 55 mm and therefore enables work to be carried out safely on the stairs.

Art. 1100004

KG 1.3 kg

§ EN 13374, class A

⚙ hot-dip galvanised (HDG)

↗ 300 x 95 mm

VT EDGE 100



The VT Edge 100 is mainly used to reliably secure the edges of stairs. The cantilever of the post to be used is 100 mm and therefore enables work to be carried out safely on the stairs.

Art. 5040005

KG 1.7 kg

§ EN 13374, class A

⚙ hot-dip galvanised (HDG)

↗ 300 x 140 mm

VT BALCONY



The VT Balcony can be mounted directly on the brickwork or on the balcony and is used to hold an edge protection post. The two attachment points prevent the post holder from swinging out in any situation.

Art. 5040023

KG 1.4 kg

§ EN 13374, class A

⚙ hot-dip galvanised (HDG)

↗ 200 x 120 mm



VT SLABSTOPFIX



The VT Slabstopfix is mounted vertically and serves both to hold an edge protection post and as a stop-end for the edge formwork. An anchor point for rolling threaded rods or anchors offers numerous application possibilities. When mounted, the distance between the punched angle steel and the slab edge is 50 mm.

Art. 5040027

KG 3.4 kg

§ EN 13374, class A

⚙ hot-dip galvanised (HDG)

↗ 950 x 95 mm

VT FRONTFIX / FRONTFIX MINI



VT Frontfix and VT Frontfix Mini are mounted vertically and serve both as an attachment for the edge protection post and as a stop-end for the edge formwork. A single fixing point offers a wide range of application and fixing options, e.g. by means of a rolling threaded rod or anchor.

Art. 5040018

KG 1.9 / 1.3 kg

§ EN 13374, class A

⚙ hot-dip galvanised (HDG)

↗ 600 / 410 mm

COLLECTIVE EDGE PROTECTION


SQUARE SYSTEM


VT STEELWEB




The VT Steelweb allows a clear cantilever of the edge protection of up to 250 mm and is used to hold an edge protection post. It is attached to walls, ceilings and steel beams.

Art. 5040009

 3.8 kg

 EN 13374, class A

 hot-dip galvanised (HDG)


 419 x 325 mm

VT ROOF ATTACHMENT



The VT Roof Attachment is designed to form an edge protection on sloping roof surfaces and is fixed to wooden beams. It can withstand dynamic loads.

Art. 1100009

 3.0 kg

 EN 13374, class C

 hot-dip galvanised (HDG)


 350 x 50 x 220 mm


VT SHEET PILE CLAMP





The VT Sheet Pile Clamp is placed on sheet pile profiles or trench sheets from 5-15 mm and fastened. It is easy to install thanks to the integrated DW15 nut and the locking thread.

Art. 1100002

 1.4 kg


 EN 13374, class A

 electrogalvanised

 175 x 112 mm



VT CLAMP XL 60

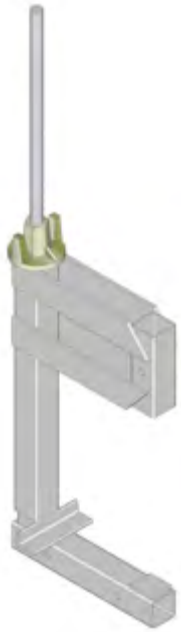

The VT Clamp XL 60 is used to hold an edge protection post without having to drill for it. This clamp allows clamping widths of 50-600 mm and offers three options for holding posts.

The welded-on rolling threaded rod enables quick fixing with a hammer. The mobile element of the clamp can be rotated depending on the thickness of the ceiling, thus increasing or decreasing the clamping range.

Art. 5040021

KG 5.8 kg

§ EN 13374, class A

🔥 hot-dip galvanised (HDG)

↗ 730 x 240 mm



VT CLAMP HOOK FOR STAIRCASE



The VT Clamp Hook for Staircase enables safe attachment of the VT Clamp XL 60 to the stair stringer. The lower part of the base body of the clamp is inserted into the clamp holder.

Art. 5041510

KG 1.4 kg

§ -

🔥 hot-dip galvanised (HDG)

↗ 200 x 300 cm

VT STEELFLANGE



The VT Steelflange is used to hold an edge protection post on steel beams without having to drill for it. This clamp allows clamping widths of 80-460 mm.

Art. 5040007

KG 3.8 kg

§ EN 13374, class A

🔥 hot-dip galvanised (HDG)

↗ 730 x 240 cm

VT TIMBER BEAM CLAMP



The VT Timber Beam Clamp is used to hold an edge protection post on H20 formwork beams with a flange thickness of 40 mm. Furthermore, this timber beam clamp is used as a stop for the edge formwork.

Art. 5041003

KG 4.3 kg

§ EN 13374, class A

🔥 hot-dip galvanised (HDG)

↗ 352 x 220 mm

COLLECTIVE EDGE PROTECTION

SQUARE SYSTEM





VT CAST IN




The VT Cast In is a cast-in sleeve that can be inserted directly into the fresh concrete on site and is used to hold an edge protection post. Furthermore, it can also be routed to the reinforcement bars in advance.

Art. 5040011

 0.06 kg

 EN 13374, class A

 plastic


 140 x 37 x 37 mm

VT STEP-IN 200




The VT Step-In 200 can be used together with the VT Cast In to achieve cantilevering of the edge protection post, e.g. to avoid protruding rebars.

Art. 5041014

 1.5 kg

 -

 hot-dip galvanised (HDG)


 238 x 195 mm


WELD-ON ATTACHMENT, SQUARE




The Weld-on Attachment is welded directly onto the steel beam or steel structure and is used to hold an edge protection post.

Art. 5100021

 0.3 kg

 EN 13374, class A

 blank

 120 mm

VT ADAPTER 25



The VT Adapter 25 fixes the edge protection post in a corresponding cast-in sleeve or in a correspondingly large hole in the ground - 25 mm round steel to 35 mm square.



Art. 5040016

0.6 kg

-

hot-dip galvanised (HDG)

224 mm

VT ADAPTER 40



The VT Adapter 40 fixes the edge protection post in a corresponding cast-in sleeve or in a correspondingly large hole in the ground - 40 mm round steel to 35 mm square.

Art. 5040017


0.7 kg

-

hot-dip galvanised (HDG)

224 mm

VT GROUND

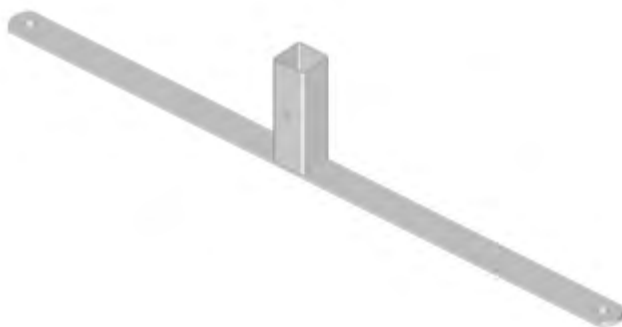

The VT Ground enables the use of our steel barriers as shutoff and helps to effectively secure danger spots. Punch holes serve to secure the VT Ground to the ground to prevent slipping. In addition, counterweights can be used to prevent unwanted movement.

Art. 5040013

1.6 kg

-

electrogalvanised

780 mm

VT 90°



The VT 90° is a product that can be used with a wide range of post holders and attachments.

Art. 5040019

0.7 kg

-

hot-dip galvanised (HDG)

170 x 155 cm

COLLECTIVE EDGE PROTECTION

ROUND SYSTEM

VT ALU POST



The VT Alu Posts have been developed for use with the steel barriers.

Due to the aluminium used, the posts are lightweight, easy to handle and easy to transport. Thanks to the built-in Easy Snap, the posts can be fixed in any round post holder. In combination with the edge protection barrier, the VT Holder and an attachment as desired, the round VT Alu Posts are part of an easy-to-install edge protection system.

VT TANK POST 1900



The VT Tank Post 1900, in conjunction as a welded combination of post and ground foot, forms a simple and stable basis for systematised edge protection. Due to its design, it combines durability and usefulness.

Art. 50319001B

KG 7.7 kg

§ EN 13374, class A

🔧 hot-dip galvanised (HDG)

↗ 1900 mm

VT ALU POST 1350 BASIC / INCL. HOLDER



Art. 5031350B / 5031350

KG 1.9 kg / 2.9 kg

§ EN 13374, class A

🔧 aluminium

↗ 1350 mm

VT ALU POST 1500 BASIC / INCL. HOLDER



Art. 5031501B / 5031501

KG 2.3 kg / 3.3 kg

§ EN 13374, class A

🔧 aluminium

↗ 1500 mm

VT ALU POST 1800 BASIC / INCL. HOLDER



Art. 5031800B / 5031800


KG 3.0 kg / 4.0 kg

§ EN 13374, class A

🔧 aluminium

↗ 1800 mm

VT ALU POST 1900 BASIC / INCL. HOLDER



Art. 5031901 / 5031900

KG 3.2 kg / 4.2 kg

§ EN 13374, class A

🔧 aluminium

↗ 1900 mm

VT HOLDER



The VT Holder is the common way of attaching steel barriers to round posts. It is used for stepless height adjustment of a wide range of steel barriers. The locking screw on the back fixes the VT Holder to the post, while the safety screw at the top serves as an anti-lift device. The VT Holder is available individually or as part of the scope of delivery of various posts from the round system.

Art. 9110049

KG 1.0 kg

§ EN 13374, class A

■ electrogalvanised

↗ 720 mm

VT HOLDER SF



The VT Holder SF was developed for use in structural steelwork and enables the barrier to be fixed to longer edge protection posts where it is not possible or desired to pull the bended top end of the barrier over the post. The VT Holder SF allows the steel barrier to be simply hung in front of the post and be secured. The pre-assembled carabiner is used to secure the holder against lifting and the locking screw is used for stepless height adjustment of this holder.

Art. 5031400SF

KG 0.8 kg

§ EN 13374, class A

■ electrogalvanised

↗ 685 mm

VT CLIP HOLDER 52



The VT Clip Holder 52 can also be used to attach an edge protection barrier to the post. Designed as a cost-effective alternative for standard applications, the carabiner grips the barrier and holds it in place, while the locking screw prevents the VT Clip Holder 52 from slipping.

Art. 5033506

KG 0.4 kg

§ EN 13374, class A

■ electrogalvanised

↗ 104 x 87 cm



COLLECTIVE EDGE PROTECTION

ROUND SYSTEM


VT FOOT, ROUND




The VT foot, round, is used to hold an edge protection post, suitable for installation on all flat surfaces - ideally on in-situ concrete. This horizontal attachment can be fixed with various screws.

Art. 5040002

 1.5 kg

 EN 13374, class A

 hot-dip galvanised (HDG)

 200 x 110 mm





VT TANK FOOT, ROUND




The very compact VT Tank Foot, round, is used to hold an edge protection post, suitable for installation on all flat surfaces.

Art. 5041002

 1.1 kg

 EN 13374, class A

 hot-dip galvanised (HDG)

 133 x 110 mm





WELD-ON ATTACHMENT, ROUND




The Weld-on Attachment, round, is welded directly onto the steel beam or steel structure and is used to hold an edge protection post.

Art. 5100022

 0.6 kg

 EN 13374, class A

 blank

 110 mm

VT STEELWEB, ROUND



The VT Steelweb, round, allows a clear cantilever of the edge protection of up to 250 mm and is used to hold an edge protection post. It is attached to walls, ceilings and steel beams.

Art. 5040010

KG 4.6 kg

§ EN 13374, class A

🔥 hot-dip galvanised (HDG)

↗ 325 x 419 mm

VT ALU BEAM CLAMP, ROUND



The VT Alu Beam Clamp, round, is used to hold an edge protection post on aluminium formwork beams. For assembly, the clamp is simply placed on the formwork beam and fixed.

Art. 5041006

KG 4.0 kg

§ EN 13374, class A

🔥 hot-dip galvanised (HDG)

↗ 346 x 212 mm

VT STAIR GRIPPER, ROUND



The VT Stair Gripper, round, is a quick, easy and non-invasive method of fixing edge protection posts and, thus, steel barriers to precast and in-situ concrete staircases.

Art. 9110045

KG 4.4 kg

§ EN 13374, class A

🔥 hot-dip galvanised (HDG)

↗ 356 x 185 mm

VT BALCONY, ROUND



The VT Balcony, round, can be mounted directly on the brickwork or on the balcony and is used to hold an edge protection post. The two attachment points prevent the post holder from swinging out in any situation.

Art. 5040026

KG 1.8 kg

§ EN 13374, class A

🔥 hot-dip galvanised (HDG)

↗ 200 x 145 mm

VT EDGE 95, ROUND



The VT Edge 95, round, is mainly used to reliably secure the edges of stairs. The cantilever of the post to be used is 95 mm and therefore enables work to be carried out safely on the stairs.


Art. 5040006

KG 1.7 kg

§ EN 13374, class A


🔥 hot-dip galvanised (HDG)

↗ 238 x 155 mm

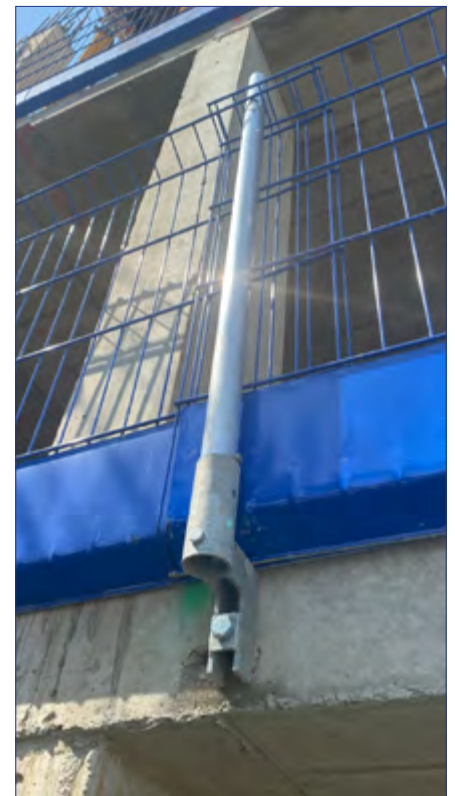

COLLECTIVE EDGE PROTECTION

ALUMINIUM BEAM SYSTEM

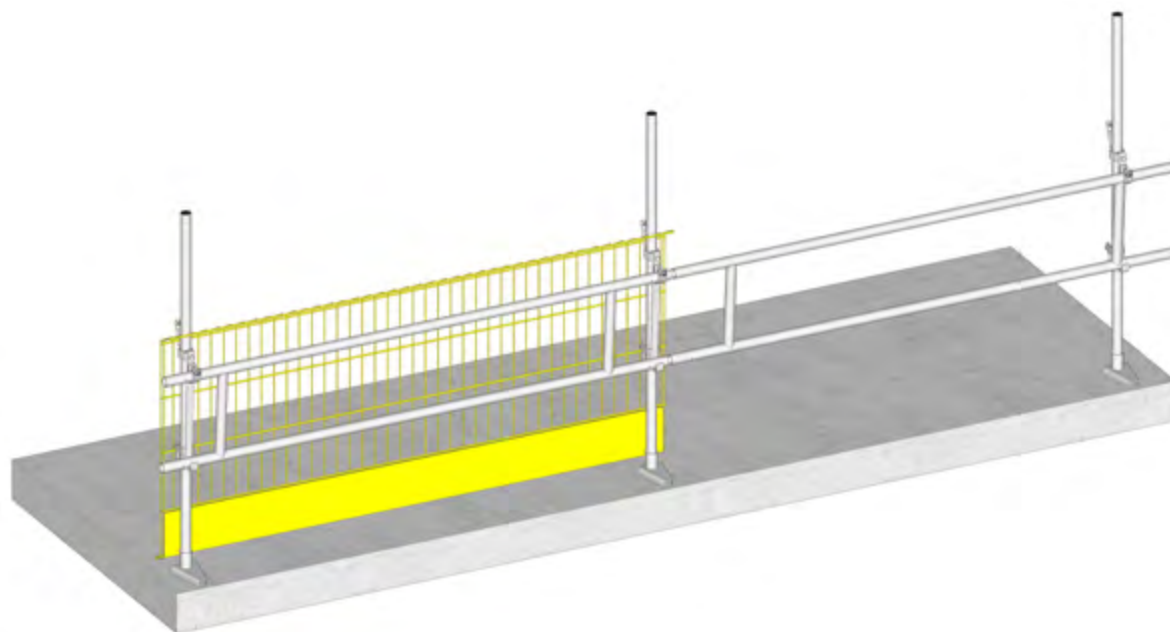


ALUMINIUM BEAM SYSTEM


The Aluminium Beam System offers collective protection against falling even after the actual edge protection barrier has been removed.

For this purpose, the Aluminium Beam Holder is fixed to that side of the VT Holder already mounted on the post which points towards the edge of the ceiling and the aluminium

beam is inserted and fixed. The spigot is used to connect two aluminium beams. If the edge protection barrier hanging in front is removed to allow façade work or access, a collective edge protection is available with the Aluminium Beam System still in position.

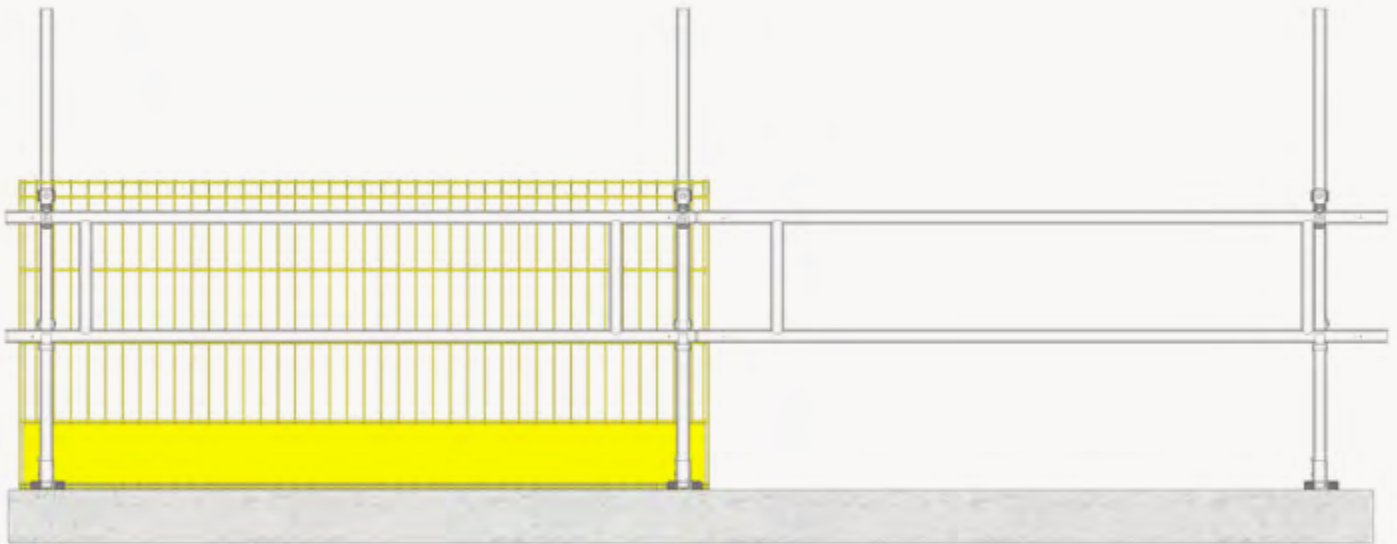

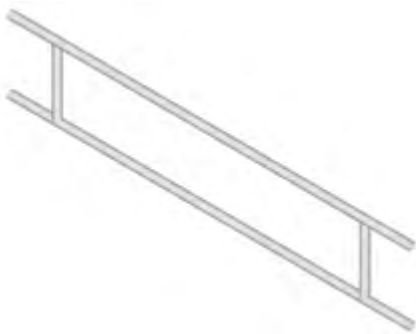

ALUMINIUM BEAM




Aluminium railing consisting of handrail and kneeboard.

Art. 9110038

 9.1 kg

 EN 13374, class A

 aluminium


 2600 mm


ALUMINIUM BEAM HOLDER




The Aluminium Beam Holder is fixed to the VT Holder and secures the Aluminium Beam.

Art. 9110035

 1.7 kg

 EN 13374, class A

 electrogalvanised


 586 mm


SPIGOT




The Spigot is used to connect two aluminium beams.

Art. 9110037

 1.0 kg

 EN 13374, class A

 electrogalvanised

 500 mm

COLLECTIVE EDGE PROTECTION

PUSHUP POST



PushUp Post

The VT PushUp Post can be clamped between the concrete floor and concrete soffit without the need for an anchor/fixing. Thanks to its innovative design it allows for quick, easy and safe installation of edge protection without the need for heavy equipment or special tools.

Compatible with several types of steel and alu mesh barrier, this proprietary solution fully complies with the requirements of EN 13374 class A – all the way up the post. A high-quality spring constructed of high strength steel serves as the compression unit and the claws fix the post comprehensively between floor and soffit. It can be used up to a maximum clear height of 3.5m.

The VT PushUp Post was specifically developed and tested by our British and German engineers to meet the current needs of the International market. Depending on the structural requirements or the customer's wishes, various holders are available for fastening the mesh barriers. The VT Holder, familiar from the circular system, can also be used to fasten the bottom layer of barriers.



VT PUSHUP POST

To install the VT PushUp Post, the inner steel tube is telescoped upwards, after which, on contact with the underside of the ceiling above, the welded-on half-coupler is closed and tightened by means of a scaffold ratchet. This creates a force-fit connection between the outer and inner steel tube.

Then, with the help of the scaffold ratchet, the entire unit is turned clockwise, which causes the spring located in the upper part of the post to be tensioned. Once the spring has disappeared under the guiding sleeve, the VT PushUp Post is correctly clamped and the steel barriers can be attached.

The system is modular, which allows easy replacement of individual damaged parts.

VT PushUp Post

- + VT Holder
- + VT Slider 52
- + VT Slider 38


VT PushUp Post


- + VT Clip Holder 52
- + VT Clip Holder 38

VT PushUp Post


- + VT Double Slider 52
- + VT Slider 52
- + VT Slider 38

Art. 5033500

 11.5 kg

 EN 13374, class A

 electrogalvanised

 3500 x 100 x 100 mm

COLLECTIVE EDGE PROTECTION


PUSHUP POST

VT SLIDER 38




Fixes the upper side of the barriers of the second layer, a second VT Slider 38 fixes the VT Make-Up Barrier 2600.

Art. 5033503

 0.7 kg

 EN 13374, class A

 electrogalvanised


 177 x 94 x 50 mm


VT SLIDER 52





Fixes the lower side of the barriers of the second layer.

Art. 5033501

 0.3 kg

 EN 13374, class A

 electrogalvanised


 177 x 57 x 50 mm


VT DOUBLE SLIDER 52





Alternative and cost-effective way to fix the bottom layer of barriers.

Art. 5033502

 0.8 kg

 EN 13374, class A

 electrogalvanised

 600 x 57 x 177 mm







VT HOLDER




One possibility to fix the bottom layer of barriers.

Art. 9110049

 1.0 kg

 EN 13374, class A

 electrogalvanised


 720 mm


VT CLIP HOLDER 38




Cost-effective way to fix the second layer of barriers.

Art. 5033507

 0.3 kg

 EN 13374, class A

 electrogalvanised


 83 x 63 x 24 mm


VT CLIP HOLDER 52




Cost-effective way to fix the bottom layer of barriers.

Art. 5033506

 0.4 kg

 EN 13374, class A

 electrogalvanised

 104 x 87 mm

COLLECTIVE EDGE PROTECTION

FAÇADE BRACKET



Façade Bracket


The standard-compliant VT Façade Bracket was primarily designed for applications in prefab construction and allows free working at the slab edge.

Consisting of only a few individual parts, this system also offers the possibility of being disassembled or relocated even if the initial assembly level is no longer accessible from the inside due to installed precast wall elements, and all this without the need for a working platform, cherry picker or crane basket.

The intelligent design allows the individual bracket units to be craned even from a higher level, without the rigger needing

direct horizontal access to the façade bracket and without putting himself in danger. The almost 300 mm cantilever of the system also allows aluminium façade sections or similar to be mounted while the edge protection is still in position.

If the VT Façade Bracket is to be used as all-round edge protection, threaded sleeves can be inserted into the precast elements in the precast factory. The M16x60 flange screws, which later hold the Mounting Brackets, are screwed into these sleeves on site, before the elements are actually placed at their destination.

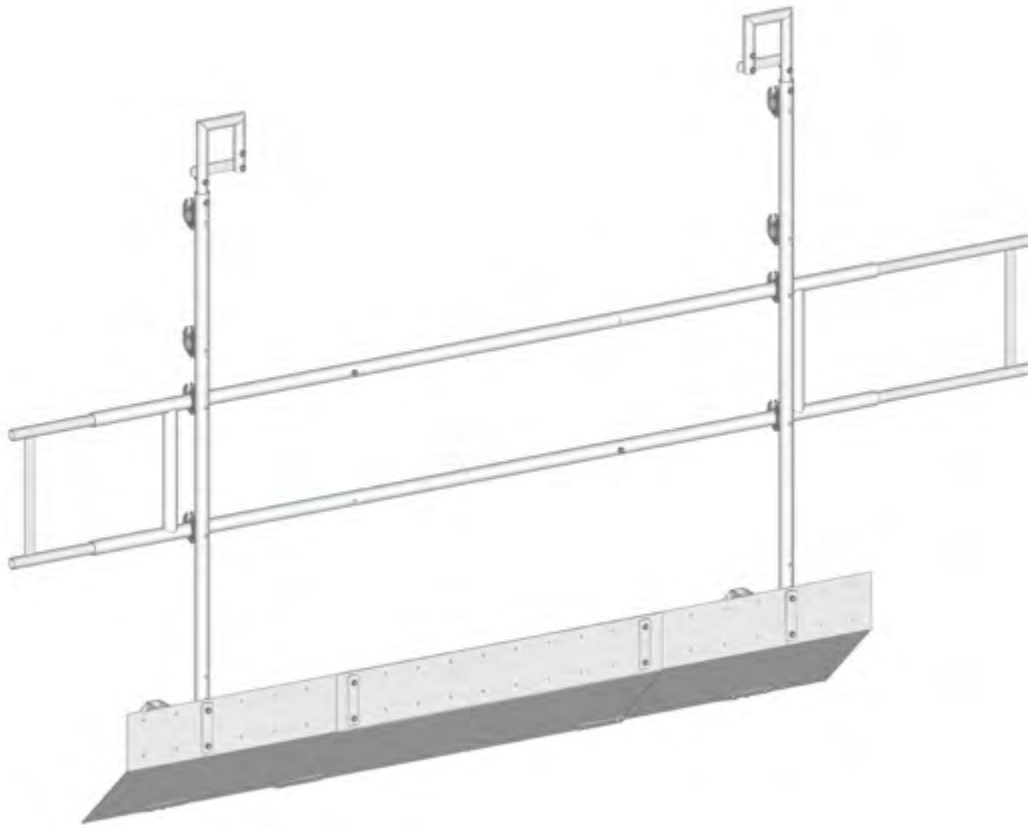

After placing the precast walls and pre-assembling of the VT Façade Bracket, the individual bracket units can be craned in, whereby the Mounting Brackets are hooked into the M16x60 flange screws. As soon as the crane slings are removed, the system is fully assembled.

If the next higher level of precast walls has been placed, the crane slings can be securely hooked in from this next higher level thanks to the self-locking crane holders on the Mounting Brackets and the unit can be raised.

VT FAÇADE BRACKET

Art. 9110049

KG 65.0 kg

§ EN 13374, class A

🔥 hot-dip galvanised (HDG)

↗ 720 mm

COLLECTIVE EDGE PROTECTION

FAÇADE BRACKET



The VT Façade Bracket creates sufficient space for working on the slab as well as for placing precast elements and façade components. Where conventional edge protection barriers and components would obstruct the working area, the VT Façade Bracket offers maximum flexibility during the construction phase. The entire slab is thus free and, thanks to the cantilever of the Mounting Bracket, there are possibilities for craning in curtain wall elements while the collective edge protection is still in position.



CRANE HOOK



The self-locking Crane Hook guarantees fast and safe craning, even from a higher level.

Art. 5100018

KG 2.0 kg

§ -

hot-dip galvanised (HDG)

↗ 350 x 180 mm

MOUNTING BRACKET



The Mounting Bracket is the core of the system. Thanks to the well thought-out design, it can be easily hooked in and out. Half-couplers provide the fixing points for the Aluminium Beam 3000.

Art. 5100015

10.4 kg

-

hot-dip galvanised (HDG)

2245 x 345 x 140 mm

ALUMINIUM BEAM 3000



The Aluminium Beam 3000 acts as a handrail and kneeboard. This lightweight railing can be extended 750 mm in both directions, the internal mechanism prevents the extensions from being pulled out completely.

Art. 5100016

10.2 kg

-

aluminium

3000 x 496 mm

PULLOUT 750



The Pullout 750 is firmly connected to the Aluminium Beam 3000 and functions as an extension of the railing. Two Pullouts are installed within one Aluminium Beam 3000.

Art. 5100017

5.5 kg

-

hot-dip galvanised (HDG)

1864 x 486 mm

HALF-COUPLER SW 22, 48,3, WITH WELDED-ON SCREW



This Half-Coupler connects the Aluminium Beam 3000 with the Mounting Brackets.

Art. 510000006

0.6 kg

-

hot-dip galvanised (HDG)

-

SHEET METAL 624 X 1250



The Sheet Metal 624x1250 does not function as a running board, but serves as a toeboard and prevents construction debris from falling towards the ground. The arrangement of the Sheet Metal allows the system to be installed precisely.

Art. 5100019

6.0 kg

-

electrogalvanised

624 x 1250 mm

CONNECTOR 125



The Connector 125 is used to extend and combine several Sheet Metals 624x1250.

Art. 5100020

0.2 kg

-

electrogalvanised

35 x 125 mm

COLLECTIVE EDGE PROTECTION

UNIVERSAL ACCESSORIES · PACKAGING




VT HINGE




The VT Hinge connects two steel barriers together. Thanks to the hinge, it can be done without one of two posts and one of two post holders for a corner clad with edge protection.

Art. 1100023

 0.6 kg

§ -

 electrogalvanised


 316 mm

VT SHAFTFIX




The VT Shaftfix allows barriers to be securely fixed to wall openings - such as lift and supply shafts - without drilling and anchoring.

Art. 5040015

 2.0 kg

§ -

 hot-dip galvanised (HDG)


 495 x 183 mm

VT SHAFTFIX ECO




The VT Shaftfix Eco is used with the barriers to secure lift and supply shafts as well as other vertical openings. The legs of the VT Shaftfix Eco grip the vertical wire rods of the barriers.

Art. 9110033

 0.4 kg

§ -

 hot-dip galvanised (HDG)

 160 x 60 mm

EURO BOX



The Euro Box is a standardized means of transportation for the safe transport of goods.

Art. 6010003

KG 70 kg

§ EN 13626

🔲 painted

↗ 1240 x 840 x 970 mm



EURO PALLET



The Euro Pallet is a standardized flat pallet for the transportation of goods.

Art. 6010004

KG 20 kg

§ -

🔲 wood

↗ 1200 x 800 x 150 cm



CATCH FANS

At Vivatec, we focus on optimising safety on construction sites. In addition to standard edge protection products, we offer another solution to increase work safety with the Catch Fan. Our Catch Fans provide reliable protection against falling objects during the construction period and catch workers who have accidents.

Made up of just a few components, the Catch Fan not only protects construction site personnel, but also the public, depending on the situation and application.

Safety requirements

Once a year, the Catch Fans in use must be inspected. The main focus here is on the material safety of the net structures. For this purpose, one of the test threads attached to the Catch Fan net must be sent to Vivatec or to an accredited testing institute.

The regular safety checks on the construction site and the checks after load impacts remain unaffected by this requirement.




Due to the 3m cantilever, the Catch Fan in front of the building creates an appropriate protection zone against falling objects, such as materials, tools or construction debris. In addition, it is intended to cushion falls of injured construction site personnel and to enable rescue.

Due to its application possibilities, the Catch Fan can be adapted to a wide variety of construction situations. It can also be used in confined spaces without any problems, as the Catch Fan can be folded up towards the façade and be secured, e.g. to allow material transport near the ceiling edge.

The safety net has a mesh size of 60x60 mm. The standard scope of delivery of the Catch Fan also includes a fine-mesh net with a mesh size of 20x20 mm. It is firmly connected to the safety net to protect against falling small objects. On customer request, the net structure can additionally be provided with a third layer of a 2x3 mm dust protection net.

CATCH FAN 4M

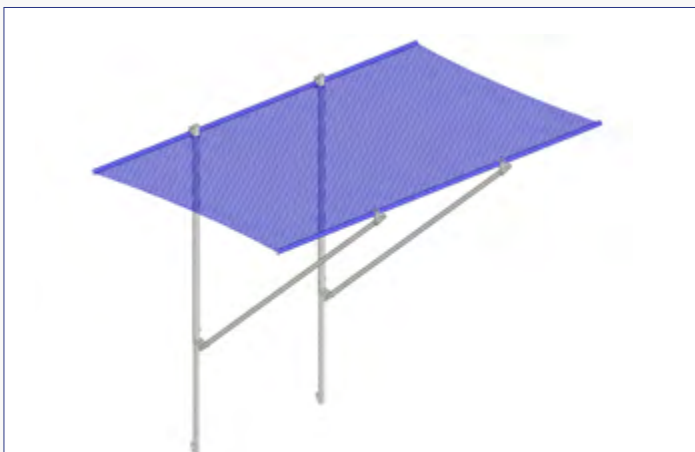

The Catch Fan 4m has a net surface of 12 m².

Art. 5054000


KG 67 kg

§ EN 1263

🔧 hot-dip galvanised (HDG) / aluminium

↗ 4000 x 3000 mm

CATCH FAN 6M

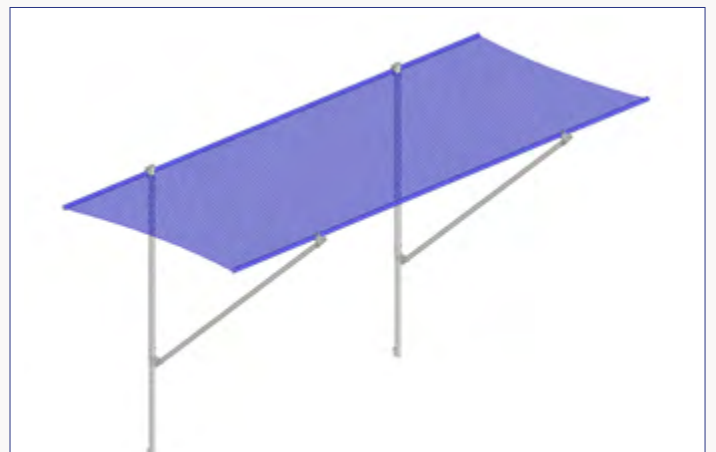

The Catch Fan 6m is the largest one in our range of catch fans with a net surface of 18 m².

Art. 5056000

KG 91 kg

§ EN 1263

🔧 hot-dip galvanised (HDG) / aluminium

↗ 6000 x 3000 cm


CATCH FANS



CATCH FAN with

- Kneebrace
- Slab Fix


Art. 50500021
Art. 5050003_S

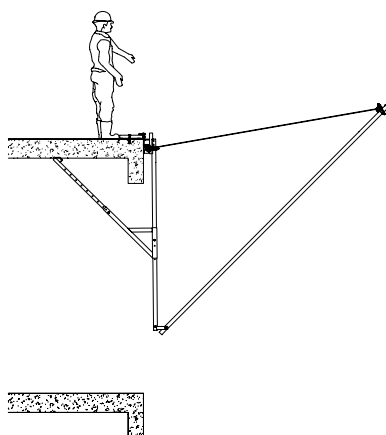

CATCH FAN with

- Extension
- Slab Fix


Art. 5050001
Art. 5050003_S

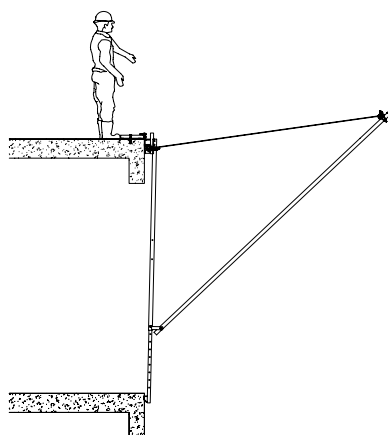


CATCH FAN with

- Wall Fix

Art. 5050003_W

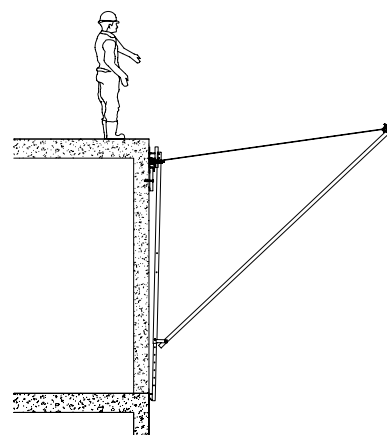

SLAB FIX




The Slab Fix for Catch Fan is for use on horizontal surfaces at the slab edge.

Art. 5050003_S

KG 4.7 kg

§ EN 1263

 hot-dip galvanised (HDG)

 430 x 270 mm

WALL FIX




The Wall Fix for Catch Fan is for use on vertical surfaces such as walls.

Art. 5050003_W

KG 4.7 kg

§ EN 1263

 hot-dip galvanised (HDG)

 575 x 120 mm

SCAFFOLD FIX





The Scaffold Fix for Catch Fan is for use on scaffolds.

Art. 5050004

KG 2.4 kg


§ EN 1263

 hot-dip galvanised (HDG)

 270 x 215 mm



CATCH FANS

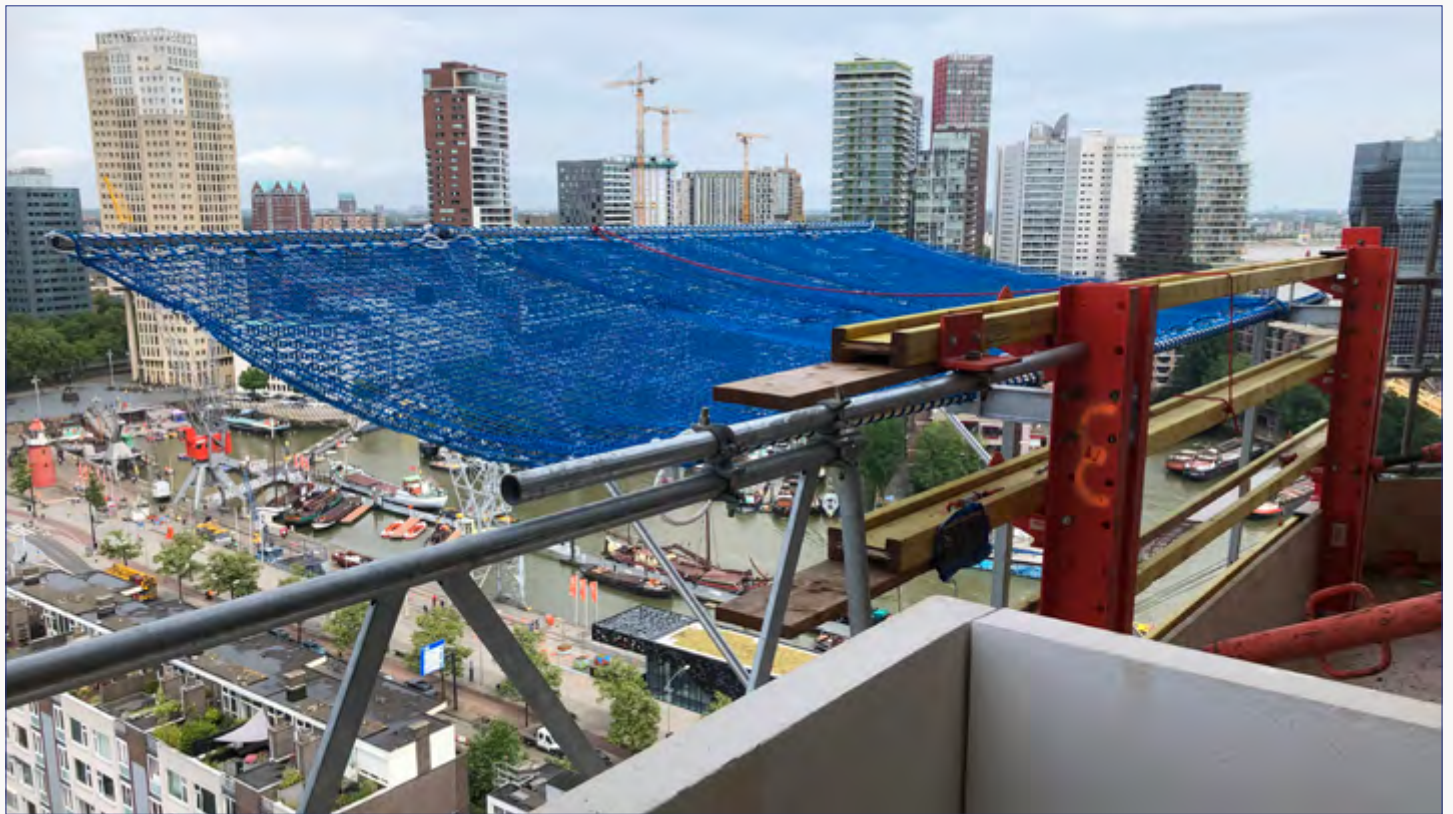

RCS BEAM FIX



The RCS Beam Fix is used for mounting catch fans on RCS beams.

Art. X18000977

KG 10.2 kg

§ EN 1263

🔥 hot-dip galvanised (HDG)

↗ 570 x 74 mm

KNEEBRACE



In case of more than 3800 mm slab height, the ground support extension secures the Catch Fan by means of a Kneebrace on the underside of the slab and provides the necessary load transfer.

Art. 5050021

KG 7.7 kg

§ EN 1263

🔥 hot-dip galvanised (HDG)

↗ 900 x 700 x 400 mm

COUPLER 90°



The Coupler 90° connects the outer horizontal tube to the diagonal tube of the Catch Fan.

Art. 5056005

KG 1.3 kg

§ EN 74

🔥 hot-dip galvanised (HDG)

↗ -

HALF-COUPLER SW 22, 48,3, WITH BOLT



The half-coupler connects the ground support of the Catch Fan to the inner horizontal tube.

Art. 5100000006

0.6 kg

-

hot-dip galvanised (HDG)

-

14X130 HEXAGON CONCRETE SCREW



The 14x130 Concrete Screw is used to securely fix Slab Fix and Wall Fix to the slab edge or wall.

Art. 8610000145

-

Single attachment acc. to ETA-16/0043

hot-dip galvanised (HDG)

14 x 130 mm

VT PARAPET FIX



The VT Parapet Fix enables the mounting of catch fans on concrete parapets. The parapet clamps are simply placed on the parapets and tightened with the locking screw.

Art. 9120006

9.7 kg

EN 1263

hot-dip galvanised (HDG)

400 x 416 mm

TRESTLE



The Trestle is a useful tool for the pre-assembly of Catch Fans. Its main purpose is to make it easier to connect the individual parts such as the net structure and the ground supports.

Art. 9310016

12.5 kg

-

hot-dip galvanised (HDG)

1153 x 670 x 475 mm



Alle nets are produced at Huck Nets in Asslar, Germany.

Each net has an RFID chip which simplifies inspection and maintenance.





Stairways

Vivatec Stairways can be supplied in two widths - 70 cm and 100 cm.

- The **Stairway 70** has a total width of approx. 800 mm, the inner width is approx. 700 mm.
- The **Stairway 100** has a total width of approx. 1,100 mm, the inner width is approx. 1,000 mm.
- The Vivatec Stairways are available in 6 different lengths, which can be safely connected to each other. In this way, height differences of up to 4.75 m can be conquered with a single Stairway.
- The maximum number of steps is 21. For this, two Stairways must be connected to each other (e.g. an 18-step Stairway with a 3-step Stairway). All necessary fasteners are included in the scope of delivery.
- Each Stairway is supplied with two handrails that adjust to the inclination angle of the Stairway.
- The foldable steps always remain horizontal, the inclination angle of the Stairway has no influence on this.
- The Stairway gets its stability as soon as it is at the right angle.
- The Stairways are made of galvanised square steel tubes. The steps are made of non-slip, punched sheet metal. The four stair feet guarantee a high degree of stability.
- To simplify transport and storage, the Stairways can be folded flat.
- The Stairways can be pre-assembled to the required length before transport. However, on-site assembly is possible without any effort.
- Two people can easily erect the Stairways on site. The handrails have to be inserted, the special lifting devices help to bring the Stairways into the desired position.

All Vivatec Stairways are manufactured in accordance with the European standard EN 12811. This standard defines the performance requirements and general design of temporary structures for buildings.

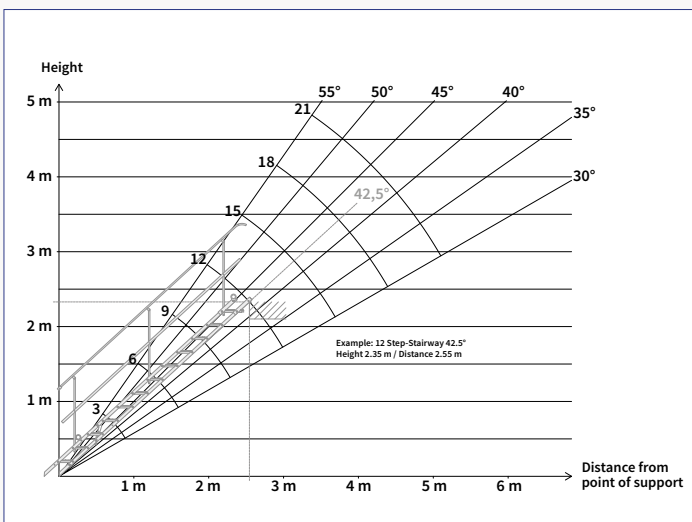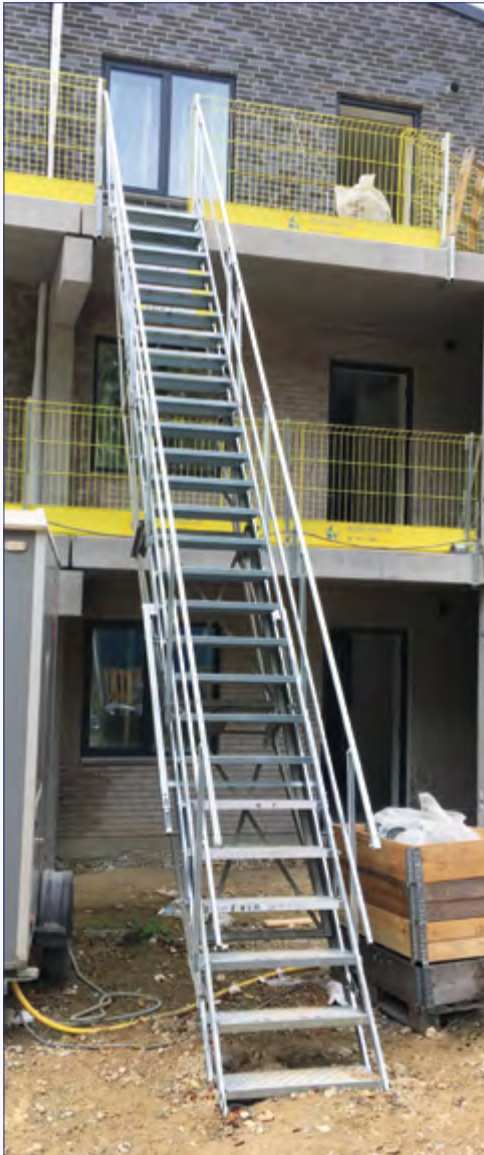

INCLINATION DIAGRAM

Please use the adjacent inclination diagram when selecting the stair length. The recommended inclination angle lies between 30° and 55°.

This is how you work with the inclination diagram:

1. First mark the total height on the height axis.
2. Then draw a horizontal line down to the inclination angle.
3. The number of steps must be calculated according to the inclination angle.
4. In order to determine the correct distance between the stair base and the point of support, you must draw a vertical line downwards from this point of intersection (cf. 2.).

ACCESS SOLUTIONS

STAIRWAYS



STAIRWAY 700, 3 STEPS



Art. 5060003

39 kg

EN 12811

hot-dip galvanised (HDG)

dimensions: 1640 x 800 mm
height: 510 - 835 mm

STAIRWAY 700, 6 STEPS



Art. 5060006


62 kg

EN 12811

hot-dip galvanised (HDG)

dimensions: 2450 x 800 mm
height: 920 - 1505 mm

STAIRWAY 700, 9 STEPS

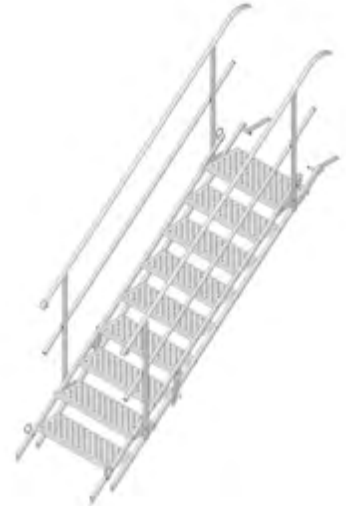

Art. 5060009


83 kg

EN 12811

hot-dip galvanised (HDG)

dimensions: 3260 x 800 mm
height: 1320 - 2160 mm

STAIRWAY 700, 12 STEPS

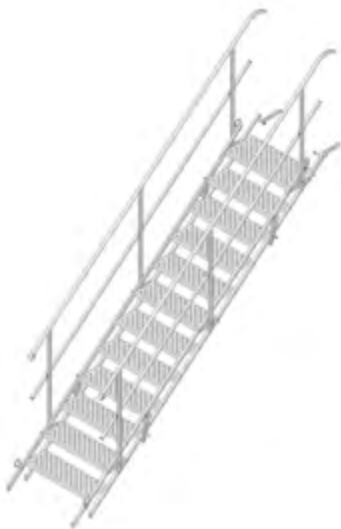

Art. 5060012

110 kg

EN 12811

hot-dip galvanised (HDG)

dimensions: 4070 x 800 mm
height: 1725 - 2825 mm

STAIRWAY 700, 15 STEPS



Art. 5060015


147 kg

EN 12811

hot-dip galvanised (HDG)

dimensions: 4610 x 800 mm
height: 2130 - 3490 mm

STAIRWAY 700, 18 STEPS

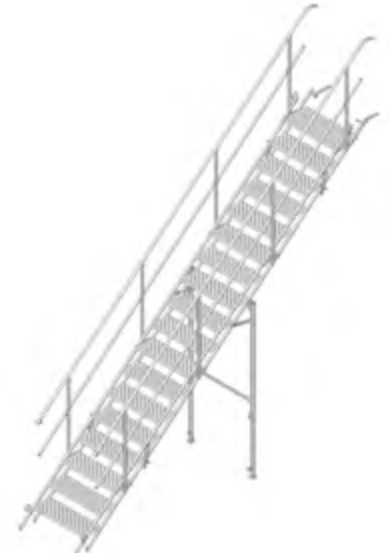

Art. 5060018

174 kg

EN 12811

hot-dip galvanised (HDG)

dimensions: 5420 x 800 mm
height: 2535 - 4155 mm

ACCESS SOLUTIONS

STAIRWAYS



STAIRWAY 1000, 3 STEPS



Art. 5061003

KG 43 kg

§ EN 12811

■ hot-dip galvanised (HDG)

↗ dimensions: 1640 x 1100 mm
height: 510 - 835 mm

STAIRWAY 1000, 6 STEPS



Art. 5061006


KG 70 kg

§ EN 12811

■ hot-dip galvanised (HDG)

↗ dimensions: 2450 x 1100 mm
height: 920 - 1505 mm

STAIRWAY 1000, 9 STEPS

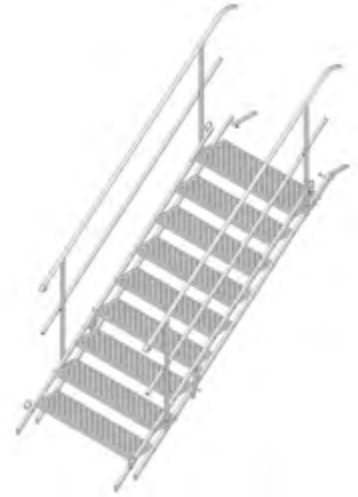

Art. 5061009


KG 97 kg

§ EN 12811

■ hot-dip galvanised (HDG)

↗ dimensions: 3260 x 1100 mm
height: 1320 - 2160 mm

STAIRWAY 1000, 12 STEPS

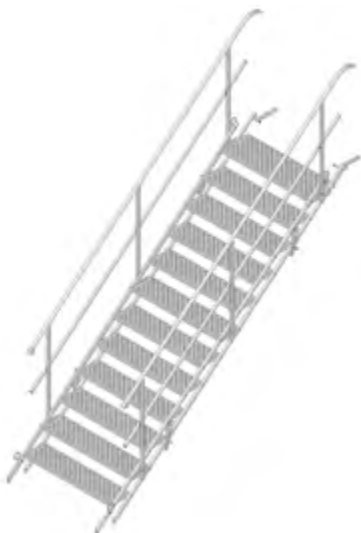

Art. 5061012


KG 128 kg

§ EN 12811

■ hot-dip galvanised (HDG)

↗ dimensions: 4070 x 1100 mm
height: 1725 - 2825 mm

STAIRWAY 1000, 15 STEPS

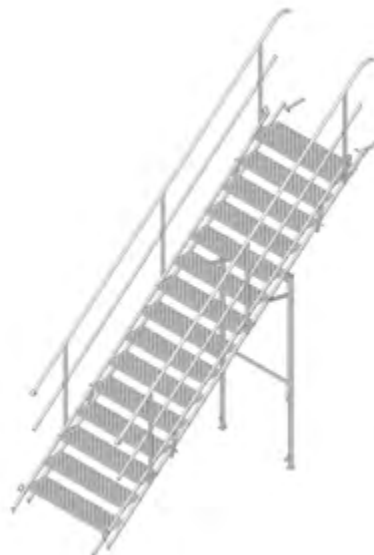

Art. 5061015

KG 170 kg

§ EN 12811

■ hot-dip galvanised (HDG)

↗ dimensions: 4610 x 1100 mm
height: 2130 - 3490 mm

STAIRWAY 1000, 18 STEPS



Art. 5061018

KG 200 kg


§ EN 12811

■ hot-dip galvanised (HDG)


↗ dimensions: 5420 x 1100 mm
height: 2535 - 4155 mm





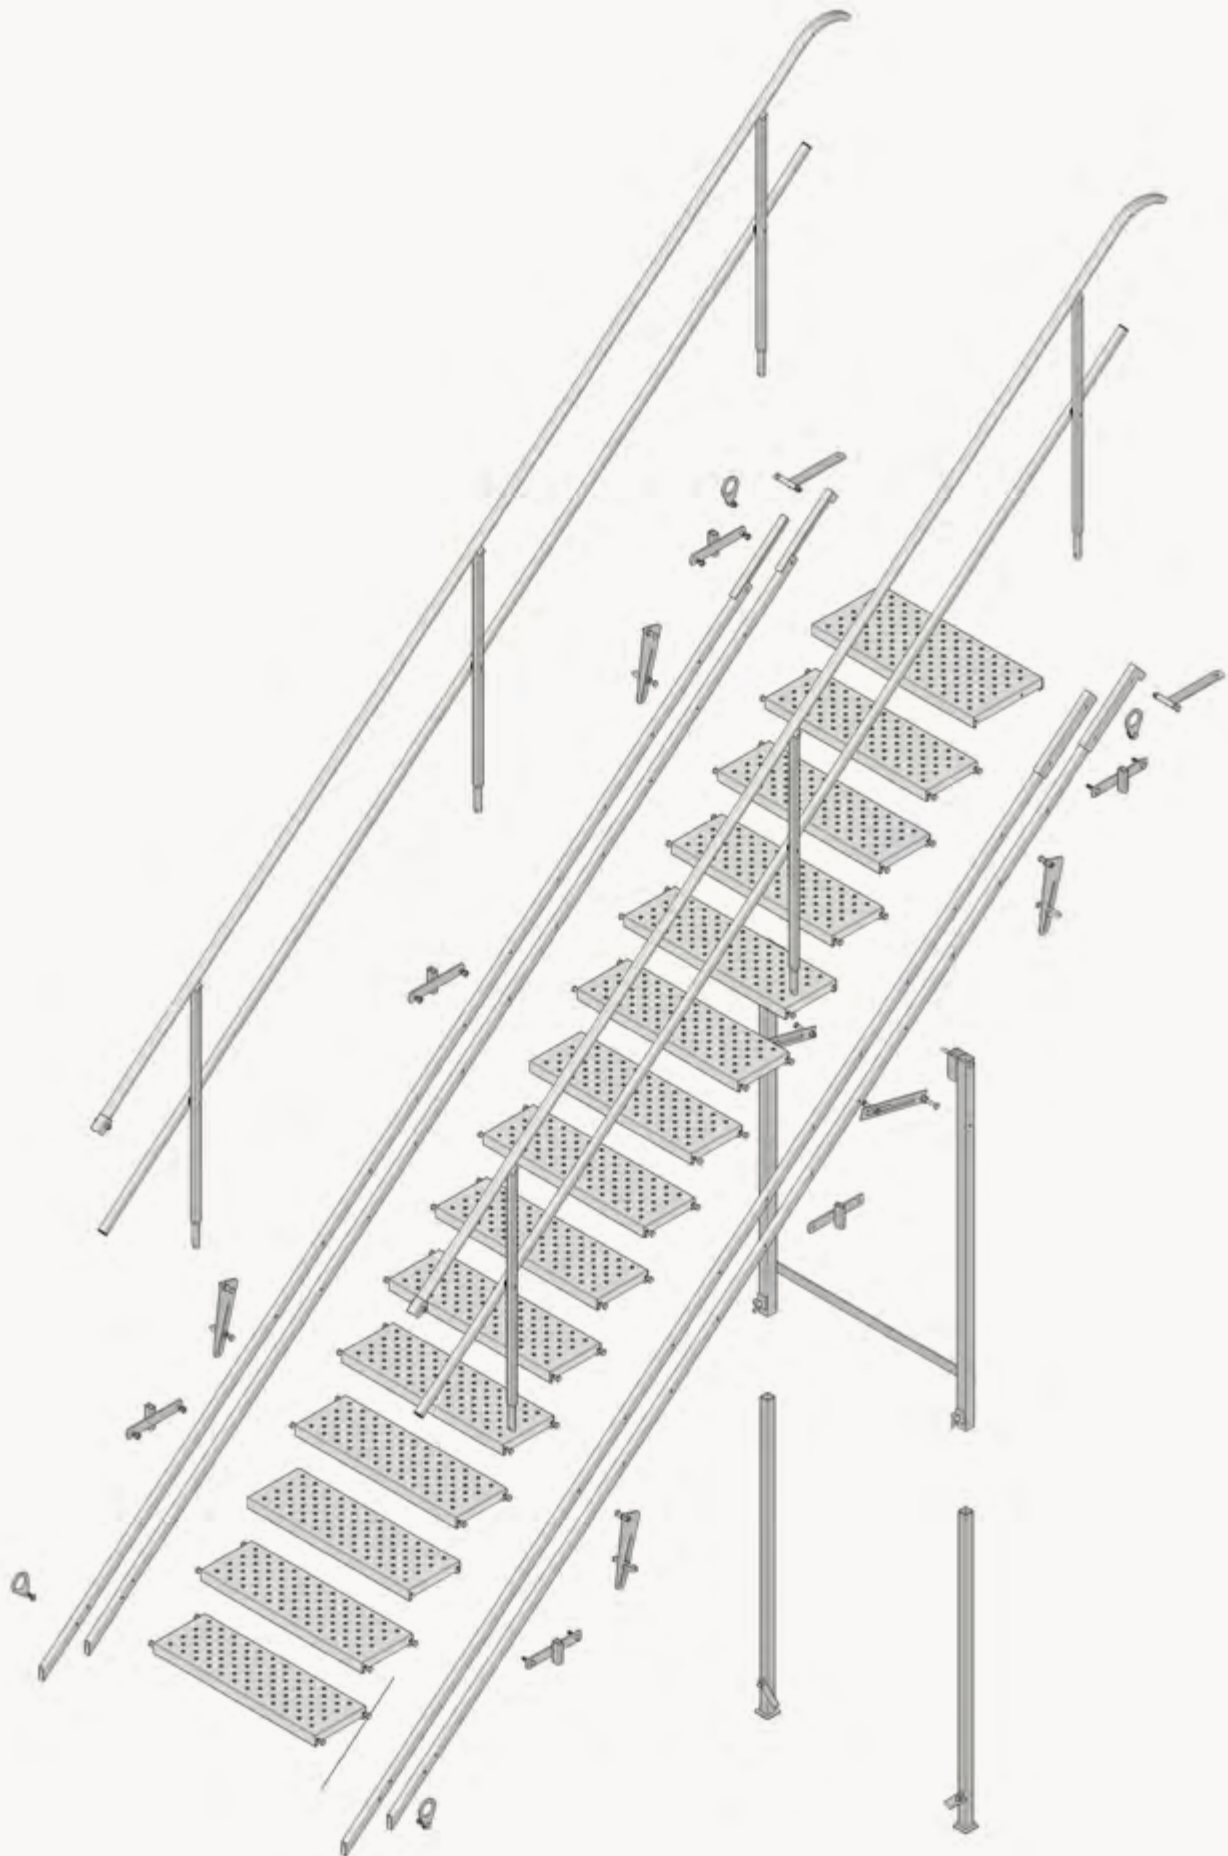



ACCESS SOLUTIONS


STAIRWAYS



STEP









- Art. 5161010
 3.7 kg
 225 x 700 mm
- Art. 5161011
 4.7 kg
 305 x 700 mm
- Art. 5161012
 5.1 kg
 225 x 1.000 mm
- Art. 5161013
 6.4 kg
 305 x 1.000 mm

 electrogalvanised

HANDRAIL





- Art. 5161036 (3 steps)
 5.7 kg
- Art. 5161066 (6 steps)
 8.2 kg
- Art. 5161096 (9 steps)
 10.6 kg
- Art. 5161126 (12 steps)
 14.5 kg
- Art. 5161156 (15 steps)
 16.9 kg
- Art. 5161186 (18 steps)
 20.9 kg

 hot-dip galvanised (HDG)



CRANE HOOK 50




- Art. 5161002
 0.2 kg
 hot-dip galvanised (HDG)







CROCODILE 290



- Art. 50610019
 0.3 kg
 hot-dip galvanised (HDG)

SIDE BEAM








- Art. 5161031 (3 steps)
 9.7 kg
- Art. 5161061 (6 steps)
 15.6 kg
- Art. 5161091 (9 steps)
 21.5 kg
- Art. 5161121 (12 steps)
 27.3 kg
- Art. 5161151 (15 steps)
 33.2 kg
- Art. 5161181 (18 steps)
 39.1 kg

 hot-dip galvanised (HDG)

SUPPORT 700 / 1000





- Art. 5061001
 13.3 kg
 700 mm
- Art. 5061005
 13.7 kg
 1.000 mm

 hot-dip galvanised (HDG)



POST HOLDER 240 X 80



- Art. 5161004
 0.5 kg
 hot-dip galvanised (HDG)



SLAB FIX 249 X 6



- Art. 5161001
 0.5 kg
 hot-dip galvanised (HDG)



LOCK 240 X 74



- Art. 5161003
 0.4 kg
 hot-dip galvanised (HDG)

SCAFFOLD FIX BT



- Art. 5061103
 0.2 kg
 hot-dip galvanised (HDG)

ACCESS SOLUTIONS

STAIRWAYS





STAIRWAY 1000, 18 STEPS, 3KN



ADJUSTABLE STEP WITH BRACKET 700 / 1000



The Adjustable Step with Bracket 70/100 cm can be nailed or screwed as a step to/on suitable squared timbers. Depending on how the side plates are bolted to the step, inclinations of 30°, 40° and 55° can be realised. As with the Stairway, the step is very non-slip and easy to clean. Following the modular principle, the side plates can be easily replaced if damaged.

Art. 5060700

KG 5.6 kg
700 mm


Art. 5061000

KG 7.0 kg
1.000 mm

§ EN 12811

electrogalvanised



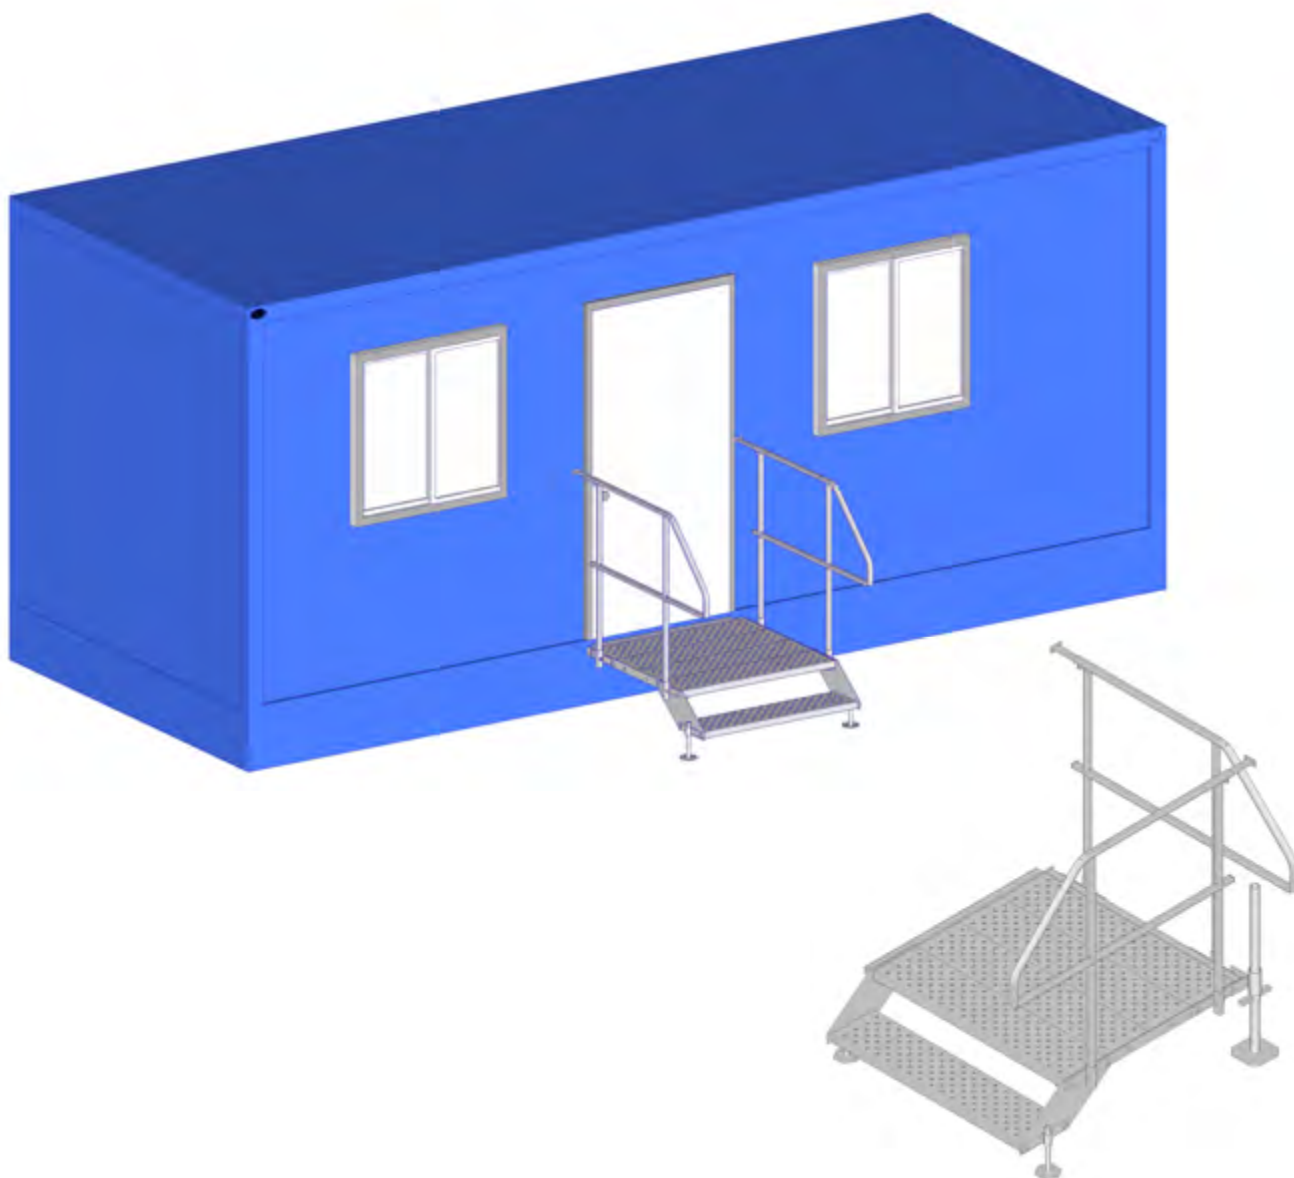

Container Podest

The Container Podest is a simple and consistently modular solution for access to construction and office containers.

The podest surface is 1x1 m.


Unlike other entrance staircases, the Container Podest consists of a single-step basic module, which can then be extended in advance or on site with one or two Podest Extension Sets, depending on the requirements, floor conditions, etc. In this way, a two- or three-level podest can easily be formed from a single-level podest.

With the help of a few accessories, the forward-facing podest can also be converted into a 90° Container Podest, which is helpful in confined spaces or with narrow access routes.

The two handrails are part of the delivery, whereby the extension in the handrail can be telescoped outwards and then fixed to enable a handrail connection to the container.

The Container Podest is fixed by the bolted U-profile, which is hooked into the Container Attachments previously screwed to the container.

To compensate for uneven floors, the support feet can be adjusted in height by almost 200 mm thanks to the welded-on thread. This ensures that the Container Podest is always levelled.

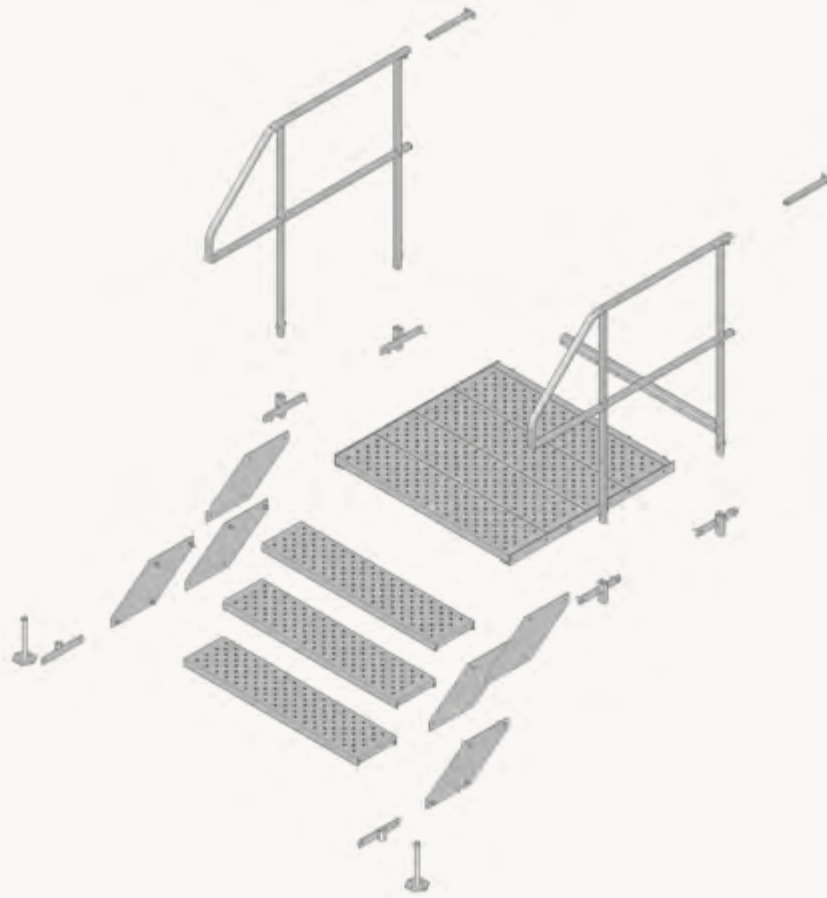

PODEST 1000



Art. 2400001

KG 61 kg

§ EN 12811

■ hot-dip galvanised (HDG)

↗ 1351 x 1291 x 1164 mm

PODEST 1000-2



Art. 2400002

KG 72 kg

§ EN 12811

■ hot-dip galvanised (HDG)

↗ 1526 x 1403 x 1164 mm

PODEST 1000-3



Art. 2400003

KG 83 kg

§ EN 12811

■ hot-dip galvanised (HDG)

↗ 1701 x 1632 x 1164 mm

ACCESS SOLUTIONS


CONTAINER PODEST

PODEST EXTENSION SET




The Podest Extension Set is used to extend the single-level basic module to a two- or three-level podest.

Art. 2400007

 9.5 kg

 -

 electrogalvanised


 1000 mm

HANDRAIL FOR PODEST 1000




The Podest Handrails serve as fall protection and are screwed into the post holders. The extensions in the handrail can be telescoped towards the container and connected to it.

Art. 2400004

 7.2 kg

 -

 hot-dip galvanised (HDG)


 1200 x 1100 mm

HANDRAIL EXTENSION 240



The Handrail Extension 240 serves as connection to the container, thus closing the gap between the handrail and the container wall.

Art. 2400007

 0.3 kg

 -

 electrogalvanised


 240 mm

SPINDLE FOOT ATTACHMENT



The Spindle Foot Attachment is used to hold the Spindle Foot 1000 and is screwed to the podest.

Art. 2400005

 0.6 kg

 -

 electrogalvanised


 -

SPINDLE FOOT 1000




The Spindle Foot 1000 supports the podest when used at 90° in confined spaces or narrow access routes.

Art. 2400006

 4.7 kg

 -

 hot-dip galvanised (HDG)


 1000 mm

CONTAINER ATTACHMENT




Two Container Attachments are screwed to the container and are then used to hook in the Container Podest.

Art. 2400008

 0.4 kg

 -

 electrogalvanised

 94 x 50 mm

90° PODEST ATTACHMENT



The 90° Podest Attachment is screwed to the podest and is hooked in the container attachments.

Art. 5200003

KG 2.8 kg

§ -

§ hot-dip galvanised (HDG)

↗ 900 mm

POST HOLDER 100



The handrails are inserted and screwed into the Post Holders 100.

Art. 5200004

KG 0.6 kg

§ -

§ electrogalvanised

↗ 240 x 100 mm

SIDE PLATE 225



Two Side Plates 225 each hold the step of the podest. As part of the podest extension set, they allow even more steps to be added.

Art. 5200005

KG 2.2 kg

§ -

§ electrogalvanised

↗ 474 x 225 mm

FOOT 200 ASSEMBLY KIT



Thanks to the Foot 200, the podest can be adjusted in height to compensate for uneven floors.

Art. 5200006

KG 1.3 kg

§ -

§ electrogalvanised

↗ 200 x 240 mm



ACCESS SOLUTIONS

TRENCH BRIDGES



5
kN/m²



- Stackable for transport and storage
- Separate handrails
- Non-slip treads

TRENCH BRIDGES

The Vivatec Trench Bridges ensure a safe crossing over open channel trenches. They are made of steel with non-slip treads. This allows unrestricted business operations during construction work. All trench bridges are flexibly implementable and convertible.

Each Vivatec Trench Bridge carries 5kN/m²!

The Trench Bridges are available in 5 lengths as standard, from 2 m total length up to 8 m. Pre-assembled crane hooks allow safe craning and positioning above the trench or excavation. Following the consistent modular principle, all individual parts of the Trench Bridges are replaceable in case of damage.

All Trench Bridges are available with handrails.

TRENCH BRIDGE 2 M



Art. 5062020N


KG 136 kg

§ EN 12811

■ hot-dip galvanised (HDG)

↗ 2037 x 1137 mm

TRENCH BRIDGE 3 M

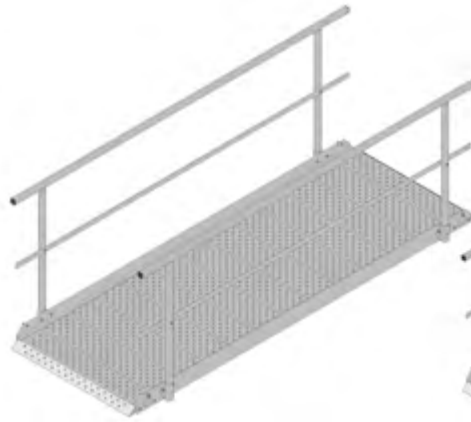

Art. 5062030N


KG 190 kg

§ EN 12811

■ hot-dip galvanised (HDG)

↗ 2935 x 1137 mm

TRENCH BRIDGE 4 M

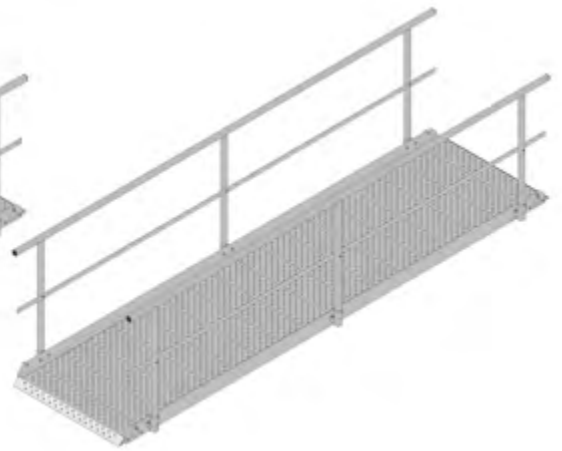

Art. 5062040N


KG 263 kg

§ EN 12811

■ hot-dip galvanised (HDG)

↗ 4063 x 1137 mm

TRENCH BRIDGE 6 M

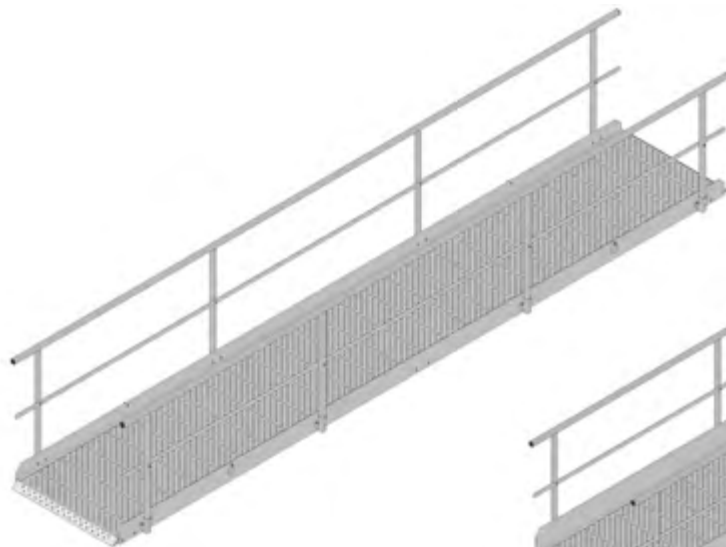

Art. 5062060N


KG 465 kg

§ EN 12811

■ hot-dip galvanised (HDG)

↗ 6090 x 1141 mm

TRENCH BRIDGE 8 M

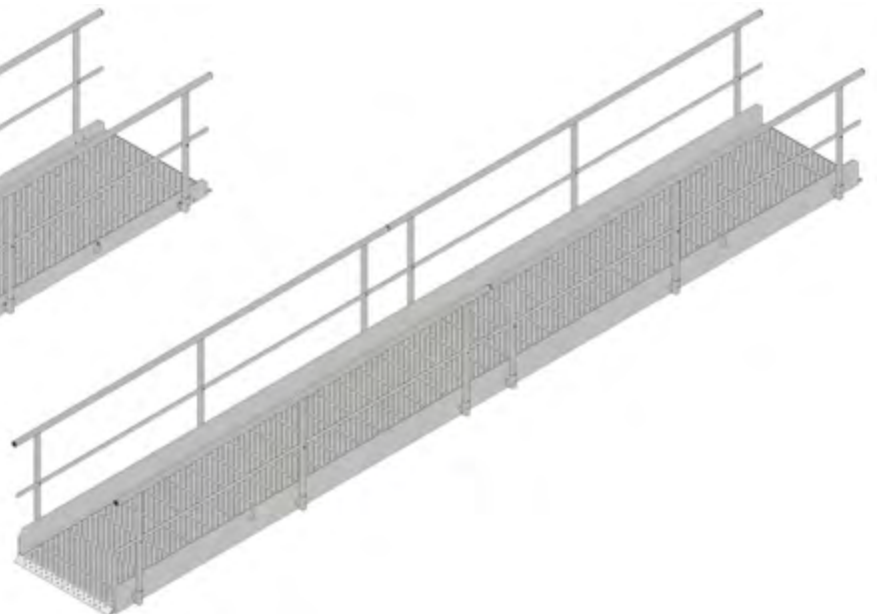

Art. 5062080N

KG 743 kg

§ EN 12811

■ hot-dip galvanised (HDG)

↗ 7990 x 1141 mm


ACCESS SOLUTIONS

TRENCH BRIDGES

TRENCH BRIDGE ECO 2 M

TRENCH BRIDGE ECO 3 M

TRENCH BRIDGE ECO 4 M

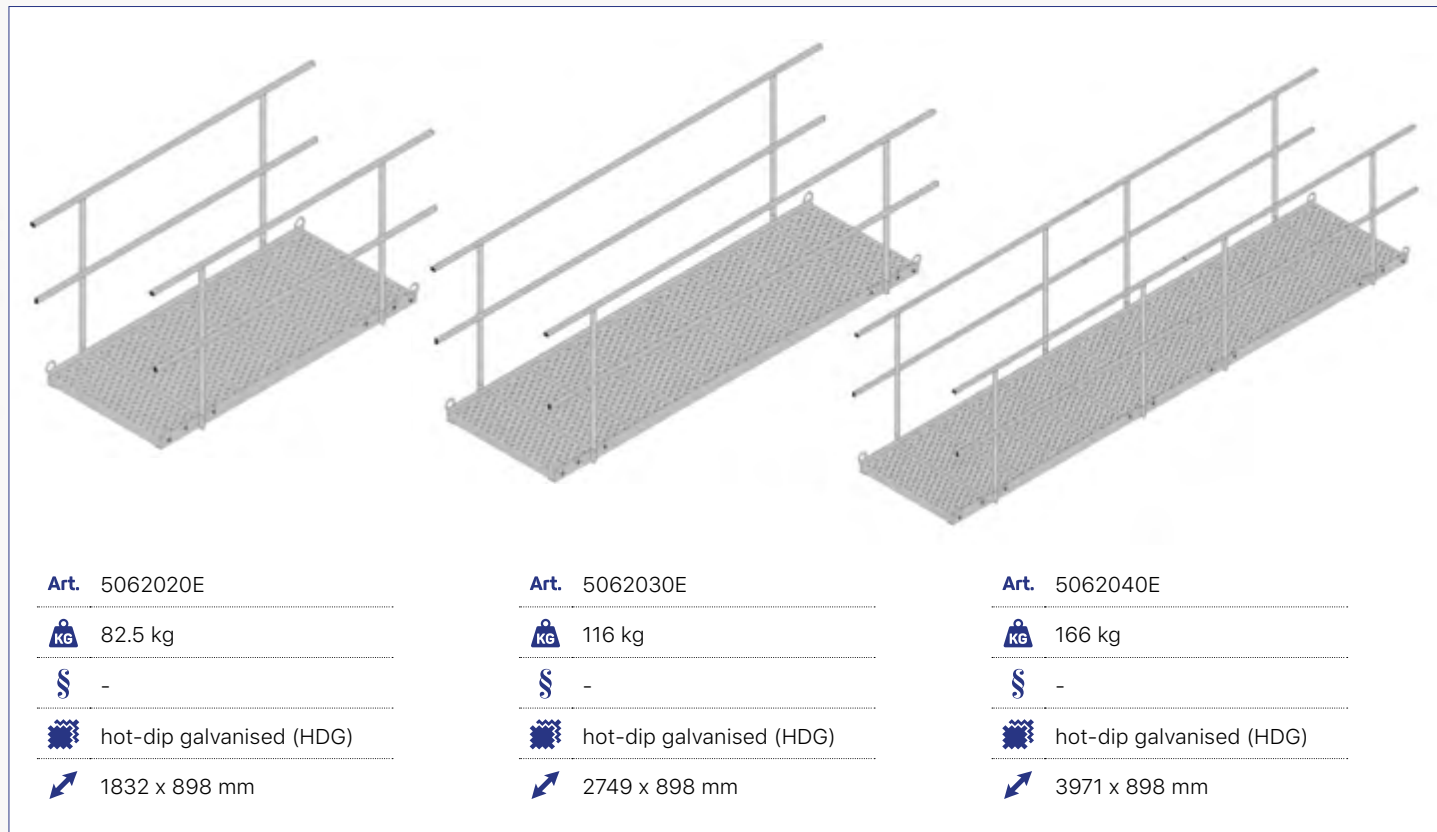

ENTRY STEP 230 X 1000




Art. 620000017

5.5 kg

hot-dip galvanised (HDG)

STEP 225 X 1000



Art. 5161012

5.1 kg

hot-dip galvanised (HDG)

STEP 305 X 1000



Art. 5161013

6.4 kg

hot-dip galvanised (HDG)

HANDRAIL



Art. 50620201 (2m)
 12 kg

Art. 50620301 (3m)
 15.5 kg

Art. 50620401 (4m)
 22.1 kg

Art. 50620601 (6m)
 32.1 kg

hot-dip galvanised (HDG)



POST HOLDER FOR TRENCH BRIDGE




Art. 5062001

1.3 kg

hot-dip galvanised (HDG)

BRACE 995



Art. X18000257

2.8 kg

hot-dip galvanised (HDG)

CRANE HOOK 50




Art. 5161002

0.2 kg

hot-dip galvanised (HDG)

HANDRAIL ECO

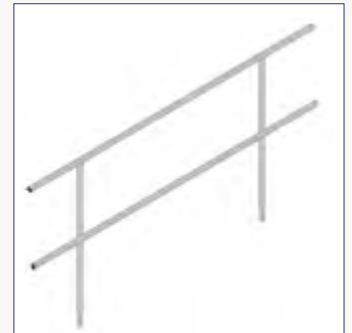

Art. 5200008 (2m Eco)
 8.3 kg

Art. 5200009 (3m Eco)
 11 kg

Art. 5200010 (4m Eco)
 16.1 kg

hot-dip galvanised (HDG)





LIFT SHAFT DOOR

The Lift Shaft Door can be opened as a whole or only the upper half of the door. The integrated triangular lock prevents unauthorised entry or accidents.

Art. 5071201

 39.3 kg

 EN 13374, class A

 hot-dip galvanised (HDG) / powder-coated

 2060 x 980 mm

Lift Shaft Gate

The Lift Shaft Gate is the safe and versatile alternative to other safeguards for lift shafts in civil engineering.

On the one hand, this temporary shaft door protects the construction site personnel from accidents and functions as a fall protection in this respect. On the other hand, it ensures easy access to carry out work inside the shaft.

The Lift Shaft Gate can be installed from the outside as well as from the inside, with the help of the fixing brackets and suspension tubes.

The upper door can be opened separately, e.g. to allow tools to be handed in.

The built-in triangular lock prevents uninvited access to the shaft, yet the intelligent design allows the entire door to be opened from the inside without a key to ensure smooth escape in case of fire or danger.

The door, which weighs less than 40 kg, can easily be adapted to the structural conditions for wider shaft openings. For this purpose, the filler panels are screwed on at the desired length. Gap covers for attachment to the upper end of the Lift Shaft Gate complete the range.

PANEL 200 / 400 / 1050



The Panels are screwed to the door when wider lift shafts need to be secured.

Art. 5071202 / 5071203 / 5071204


KG 15.6 / 23.4 / 34 kg

§ -

🔧 hot-dip galvanised (HDG)

↗ 2060 x 200 / 400 / 1050 mm

FIXING BRACKET, TOP



The upper Fixing Bracket is anchored to the wall from the outside or inside and holds the upper suspension tube. Two upper fixing brackets are required per Lift Shaft Gate.

Art. 5071209

KG 0.5 kg

§ -

🔧 powder-coated

↗ 80 x 100 mm

FIXING BRACKET, BOTTOM



The lower Fixing Bracket is anchored to the wall from the outside or inside and holds the upper suspension tube. Two lower fixing brackets are required per Lift Shaft Gate.

Art. 5071210

KG 0.6 kg

§ -

🔧 powder-coated

↗ 100 x 100 mm

SUSPENSION TUBE



The Suspension Tubes act as the basic framework of the Lift Shaft Gate and are held in place by the fixing brackets.

Art. 5071202 / 5071203 / 5071204


KG 15.6 / 23.4 / 34 kg

§ -

🔧 hot-dip galvanised (HDG)

↗ 2060 x 200 / 400 / 1050 mm

GAP COVER 200 / 400 / 980 / 1050

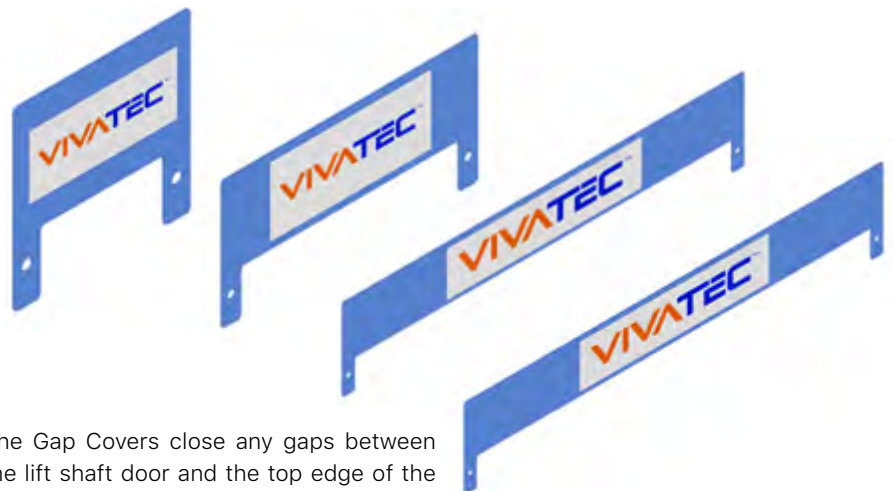

The Gap Covers close any gaps between the lift shaft door and the top edge of the shaft opening.

Art. 5071211 / 5071212 / 5071213 / 5071214

KG 0.5 / 0.9 / 2.0 / 2.2 kg


§ -

🔧 powder-coated

↗ 200 x 200 / 400 / 980 / 1050 mm

ACCESS SOLUTIONS

LIFT SHAFT GATE · JOIST HANGER

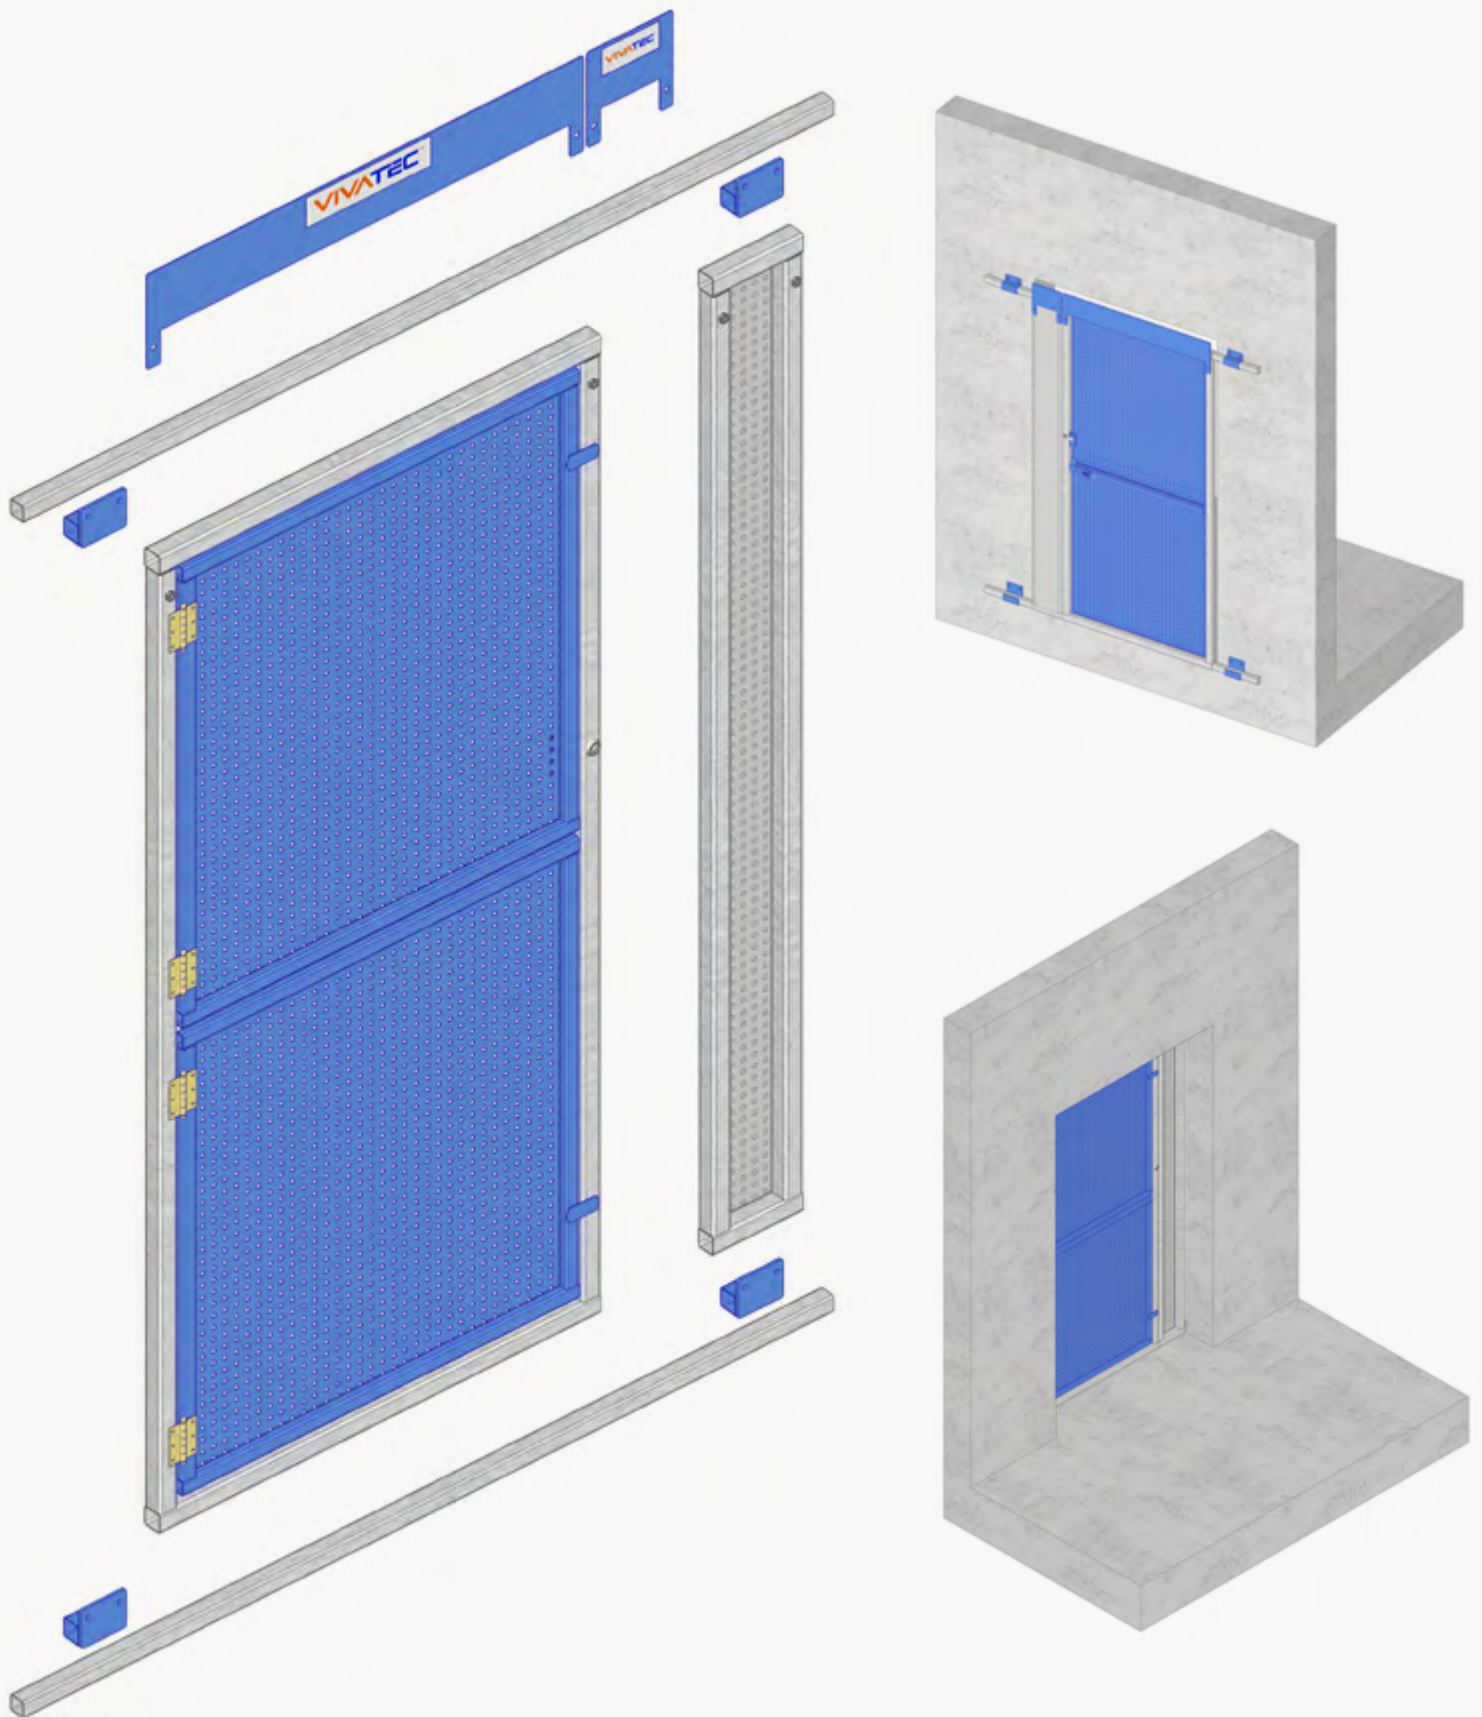


VT JOIST HANGER 55



The VT Joist Hanger 55 accommodates a wooden beam with a width < 55 mm and thus forms a substructure for safe working platforms, e.g. in shafts and openings.

Art. 5041016

 2.0 kg

 -

 hot-dip galvanised (HDG)


 270 x 190 x 75 mm

VT JOIST HANGER 82



The VT Joist Hanger 82 accommodates a H20 beam with a width < 82 mm and thus forms a substructure for safe working platforms, e.g. in shafts and openings.


Art. 5041005

 2.4 kg

 -

 hot-dip galvanised (HDG)

 270 x 190 x 102 mm

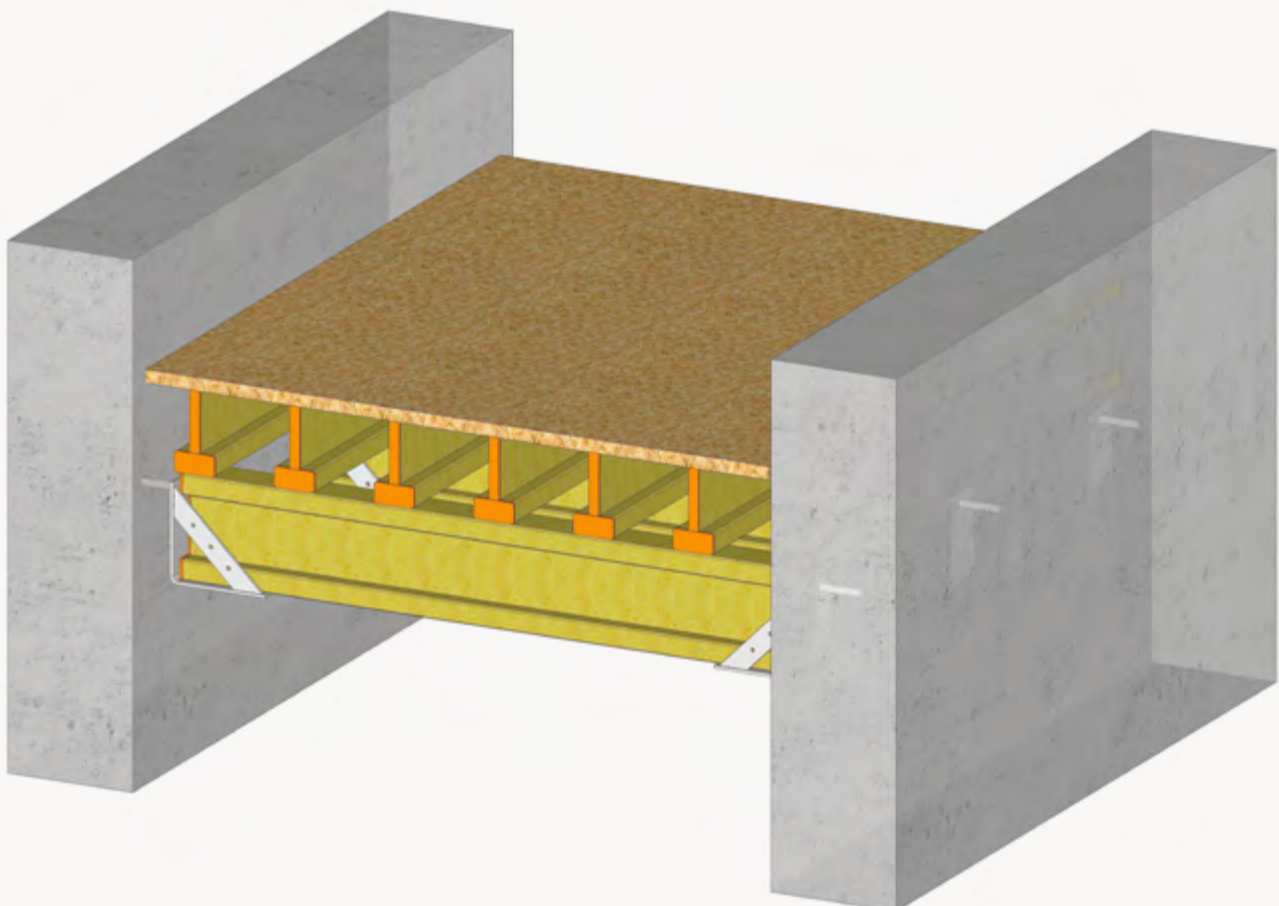

BRICKLAYER'S GAGE 3000MM




The Vivatec Bricklayer's Gage makes it immensely easier to create straight facing brickwork. It enables the bricklayer to tension a plumb line for the exact alignment of the facing. In practice, angles made of wood are usually nailed together on site and fixed to a pipe with a screw clamp, while the Vivatec Bricklayer's Gage systematises this process with just a few system parts.

A Bricklayer's Gage consists of a 3000 mm vertical tube for fastening the line, two wall brackets for fixing to the backing brickwork and two sliders for optimum positioning of the vertical tube.

The vertical tube can be cantilevered or moved freely by up to 350 mm and therefore offers flexible alignment options. The slotted holes of the wall brackets also enable an optimum fastening on the backing brickwork.



Art. B010001

 18.3 kg

 -


 hot-dip galvanised (HDG)

 3000 mm

WALL BRACKET MEL




Art. 5100012

 1.8 kg

 -


 electrogalvanised

 635 x 400 mm

X-SLIDER MEL




Art. 5100011

 0.6 kg

 -


 electrogalvanised

 100 x 80 mm

VERTICLE TUBE 3000MM




Art. 5100010

 13.5 kg

 -

 hot-dip galvanised (HDG)


 3000 mm

CLAMP MEL




Holds the vertical tube in position during jointless corner walling when the lower Wall Bracket has been removed.


Art. B010002

 2.0 kg

§ -

 electrogalvanised

 500 mm

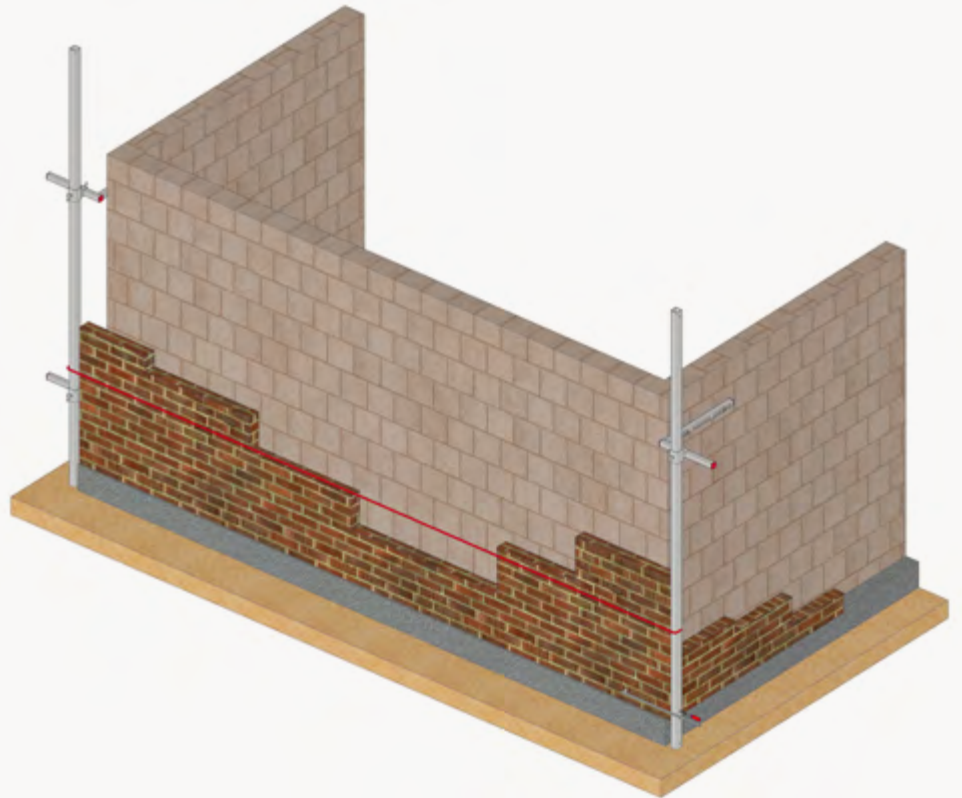


TRESTLE



The Trestle, tested up to 700 kg admissible individual load, can be used in many ways. For example, it takes up plasterboard in interior construction or serves as a support when tying reinforcement cages. Thanks to the robust construction and the high permissible total load, it can also withstand heavy loads.

Art. 9310016

 12.5 kg

§ -

 hot-dip galvanised (HDG)

 1153 x 670 x 476 mm



PRODUCT OVERVIEW

COLLECTIVE EDGE PROTECTION

STEEL BARRIER	Art.	page
Steel Barrier 2600x1180	2012611	14
Steel Barrier 1300x1180	2011311	14
Steel Barrier 2600x1150 90° R	201261190R	15
Steel Barrier 1300x1150 90° R	201131190R	15
Make Up Barrier 2,6m	9110048	15
Barrier Frame 60	2010007	15

SQUARE SYSTEM	Art.	page
VT Post 1500 incl. Slider	5031500	16
VT Post 1500 Basic	5031500B	16
VT Post 1200 Timber	5031195	16
VT Scan Post 1200	5039003	16
VT Post 1300 incl. Slider	5031300	16
VT Post 1300 Basic	5031300B	16
VT Post French incl. Slider	5030016	17
VT Post Extension 240	5030240	17
VT Post Extension 425	5030425	17
VT Slider	50315008	17
VT Holder XL	5030049	17
VT Holder XL 45	5030050	17
VT Toeboard Holder	50311951	17
VT Foot	5040001	18
VT Eco Foot	5041001	18
VT Flat Foot	1100007F	18
VT Flat Foot V2	1100025	18
VT Edge 55	1100004	19
VT Edge 100	5040005	19
VT Balcony	5040023	19
VT Frontfix	5040018	19
VT Frontfix Mini	9110018	19
VT Slabstopfix	5040027	19
VT Steelweb	5040009	20
VT Roof Attachment	1100009	20
VT Sheet Pile Clamp	1100002	20
VT Clamp XL 60	5040021	21
VT Clamp Hook for Staircase	5041510	21
VT Steelflange	5040007	21
VT Timber Beam Clamp	5041003	21
VT Cast In	5040011	22
VT Step-In 200	5041014	22
Weld-on Attachment, square	5100021	22
VT Ground	5040013	23
VT Adapter 25	5040016	23
VT Adapter 40	5040017	23
VT 90°	5040019	23

ROUND SYSTEM	Art.	page
VT Alu Post 1350 incl. Holder	5031350	24
VT Alu Post 1350 Basic	5031350B	24
VT Alu Post 1500 incl. Holder	5031501	24
VT Alu Post 1500 Basic	5031501B	24
VT Alu Post 1800 incl. Holder	5031800	24
VT Alu Post 1800 Basic	5031800B	24
VT Alu Post 1900 incl. Holder	5031900	24
VT Alu Post 1900 Basic	5031901	24
VT Tank Post 1900	50319001B	24

ROUND SYSTEM	Art.	page
VT Holder	9110049	25
VT Clip Holder 52	5033506	25
VT Holder SF	5031400SF	25
VT Foot, round	5040002	26
VT Tank Foot, round	5041002	26
Weld-on Attachment, round	5100022	26
VT Edge 95, round	5040006	27
VT Balcony, round	5040026	27
VT Steelweb, round	5040010	27
VT Alu Beam Clamp, round	5041006	27
VT Stair Gripper, round	9110045	27

ALUMINIUM BEAM SYSTEM	Art.	page
Aluminium Beam	9110038	29
Aluminium Beam Holder	9110035	29
Spigot	9110037	29

PushUp Post	Art.	page
VT PushUp Post	5033500	31
VT Slider 52	5033501	32
VT Double Slider 52	5033502	32
VT Slider 38	5033503	32
VT Holder	9110049	33
VT Clip Holder 52	5033506	33
VT Clip Holder 38	5033507	33

FAÇADE BRACKET	Art.	page
VT Façade Bracket	1100026	35
Crane Hook	5100018	36
Mounting Bracket	5100015	37
Half-Coupler SW 22, 48,3, with welded-on Screw	5100000006	37
Aluminium Beam 3000	5100016	37
Pullout 750	5100017	37
Sheet Metal 624x1250	5100019	37
Connector 125	5100020	37

UNIVERSAL ACCESSORIES	Art.	page
VT Hinge	1100023	38
VT Shaftfix	5040015	38
VT Shaftfix Eco	9110033	38

PACKAGING	Art.	page
Euro Box	6010003	39
Euro Pallet	6010004	39

CATCH FAN

CATCH FANS	Art.	page
Catch Fan 6m	5056000	41
Catch Fan 4m	5054000	41
Slab Fix for Catch Fan	5050003_S	43
Wall Fix for Catch Fan	5050003_W	43
Scaffold Fix for Catch Fan	5050004	43
RCS Beam Fix	X18000977	44
Kneebrace	5050021	44
Coupler 90°	5056005	44
Half-Coupler SW 22, 48,3, with bolt	5100000006	45

CATCH FANS	Art.	page
VT Parapet Fix for Catch Fan	9120006	45
Trestle	9310016	45
14x130 Hexagon Concrete Screw	8610000145	45

ACCESS SOLUTIONS

STAIRWAYS	Art.	page
Stairway 700, 3 steps	5060003	49
Stairway 700, 6 steps	5060006	49
Stairway 700, 9 steps	5060009	49
Stairway 700, 12 steps	5060012	49
Stairway 700, 15 steps	5060015	49
Stairway 700, 18 steps	5060018	49
Stairway 1000, 3 steps	5061003	51
Stairway 1000, 6 steps	5061006	51
Stairway 1000, 9 steps	5061009	51
Stairway 1000, 12 steps	5061012	51
Stairway 1000, 15 steps	5061015	51
Stairway 1000, 18 steps	5061018	51
Stairway 1000, 18 steps 3 kN	50610183KN	55
Step 225x700	5161010	53
Step 305x700	5161011	53
Step 225x1000	5161012	53
Step 305x1000	5161013	53
Scaffold Fix BT	5061103	53
Slab Fix 249x6	5161001	53
Crane Hook 50	5161002	53
Lock 240x74	5161003	53
Post Holder 240x80	5161004	53
Crocodile 290	50610019	53
Stairway Support 700	5061001	53
Stairway Support 1000	5061005	53
Side Beam for 3-step Stairway	5161031	53
Side Beam for 6-step Stairway	5161061	53
Side Beam for 9-step Stairway	5161091	53
Side Beam for 12-step Stairway	5161121	53
Side Beam for 15-step Stairway	5161151	53
Side Beam for 18-step Stairway	5161181	53
Handrail, 3 steps	5161036	53
Handrail, 6 steps	5161066	53
Handrail, 9 steps	5161096	53
Handrail, 12 steps	5161126	53
Handrail, 15 steps	5161156	53
Handrail, 18 steps	5161186	53

ADJUSTABLE STEP WITH BRACKET	Art.	page
Single Step with Side Plates 70 cm	5060700	55
Single Step with Side Plates 100 cm	5061000	55

CONTAINER PODEST	Art.	page
Podest 1000	2400001	57
Podest 1000-2	2400002	57
Podest 1000-3	2400003	57
Podest Extension Set	2400007	58
Handrail for Podest 1000	2400004	58
Handrail Extension 240	5200007	58
Spindle Foot Attachment	2400005	58
Spindle Foot 1000	2400006	58

CONTAINER PODEST	Art.	page
Container Attachment for Podest	2400008	58
90° Podest Attachment	5200003	59
Post Holder 100	5200004	59
Side Plate 225	5200005	59
Foot 200 Assembly Kit	5200006	59

TRENCH BRIDGES	Art.	page
Trench Bridge 2m	5062020N	61
Trench Bridge 3m	5062030N	61
Trench Bridge 4m	5062040N	61
Trench Bridge 6m	5062060N	61
Trench Bridge 8m	5062080N	61
Trench Bridge 2m, Width 800 mm (Eco)	5062020E	62
Trench Bridge 3m, Width 800 mm (Eco)	5062030E	62
Trench Bridge 4m, Width 800 mm (Eco)	5062040E	62
Entry Step 230x1000	6200000017	63
Step 225x1000	5161012	63
Step 305x1000	5161013	63
Crane Hook 50	5161002	63
Post Holder for Trench Bridge	5062001	63
Brace 995	X18000257	63
Handrail 2m	50620201	63
Handrail 3m	50620301	63
Handrail 4m	50620401	63
Handrail 6m	50620601	63
Handrail 2m Eco	5200008	63
Handrail 3m Eco	5200009	63
Handrail 4m Eco	5200010	63

LIFT SHAFT GATE	Art.	page
Lift Shaft Door	5071201	64
LSG Panel 200	5071202	65
LSG Panel 400	5071203	65
LSG Panel 1050	5071204	65
LSG Suspension Tube 1500	5071205	65
LSG Suspension Tube 1800	5071206	65
LSG Suspension Tube 2000	5071207	65
LSG Suspension Tube 3000	5071208	65
LSG Fixing Bracket, top	5071209	65
LSG Fixing Bracket, bottom	5071210	65
LSG Gap Cover 200	5071211	65
LSG Gap Cover 400	5071212	65
LSG Gap Cover 980	5071213	65
LSG Gap Cover 1050	5071214	65

JOIST HANGERS	Art.	page
VT Joist Hanger 55	5041016	67
VT Joist Hanger 82	5041005	67

CONSTRUCTION EQUIPMENT

CONSTRUCTION EQUIPMENT	Art.	page
Bricklayer's Gage 3000mm	B010001	68
Verticle Tube 3000mm	5100010	68
Wall Bracket MEL	5100012	68
X-Slider MEL	5100011	68
Clamp MEL	B010002	69
Trestle	9310016	69

IN **Safety Respect** EVERY STEP



PLANNING

We help you with an analysis of your fall protection needs at an early stage of the project.



SOLUTIONS

You are provided with a complete proposal for solutions, including training, personal and collective fall protection, based on what is best for your project.



LOGISTICS

Let us manage the logistics so the right fall protection is delivered and returned at the right time.



INSTALLATION

With our help, installation is carried out quickly and efficiently without slowing down other operations.



CHECKS

Our system for regular safety checks provides you with clear documentation and a higher level of safety throughout the project period.

VIVATECTM

BECOMES

SAFETYRESPECT[®]

VIVATEC Safety GmbH

from 01.01.2023

SafetyRespect GmbH

Im Kurzen Busch 11 · D- 58640 Iserlohn

Tel.: +49 2371 15541-0 · Fax: +49 2371 538 93 93

info@viva-tec.com

VIVA-TEC.COM

